

Ordering Information:

A1501HA-XP - ***




1 2

1.Part No.

2.Material:

(blank):PBT,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

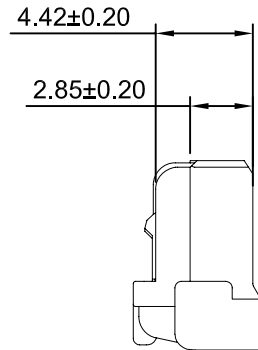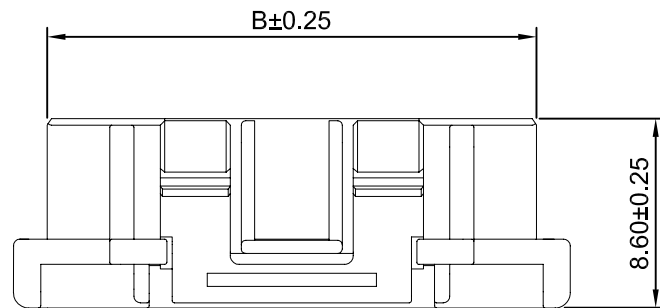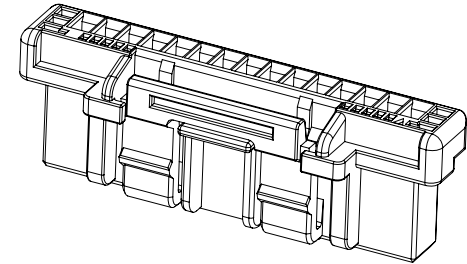

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.


Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute


Material: PBT,UL94V-0(Beige)

Ordering Information & Dimensions


Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.50	4.25	7.30	9P	12.00	14.75	17.80
3P	3.00	5.75	8.80	10P	13.50	16.25	19.30
4P	4.50	7.25	10.30	11P	15.00	17.75	20.80
5P	6.00	8.75	11.80	12P	16.50	19.25	22.30
6P	7.50	10.25	13.30	13P	18.00	20.75	23.80
7P	9.00	11.75	14.80	14P	19.50	22.25	25.30
8P	10.50	13.25	16.30	15P	21.00	23.75	26.80



2P,3P



4P,5P



6P~15P

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :
1.50mm PITCH
HOUSING

REV	DESCRIPTION	DATE	ANGLE±
A1	Change of drawings	2015.05.13	x.x≤0.25
A0	NEW RELEASE	2013.04.17	x.xx≤0.20
			x.xxx≤0.15

DRAW NO : **A1501HA-XP** REV A1