

**Ordering Information:**

C3030HMA-XP - \*\*

1 2

1.Part No.

2.Material:

(Blank):Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,IEC 60335-1,5th Edition

Glow Wire Capable.

**SPECIFICATIONS:**

Current Rating: 12.5A AC,DC (AWG #18 MAX)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(Black)


**Ordering Information & Dimensions**

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.00	6.85	8P	21.00	24.85
3P	6.00	9.85	9P	24.00	27.85
4P	9.00	12.85	10P	27.00	30.85
5P	12.00	15.85	11P	30.00	33.85
6P	15.00	18.85	12P	33.00	36.85
7P	18.00	21.85			


**CJTconn** CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 2		
DRWN	CHK'D	APPR	3.00mm Pitch Single Row Housing	
Xu Lei	Dlankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C3030HMA-XP	A3


REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2022.01.14
A2	CHANGE THE DRAWING	2019.12.27
A1	MODIFY DRAWING	2019.09.20
A0	NEW RELEASE	2018.12.15




2P

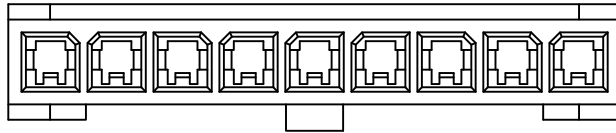


9P

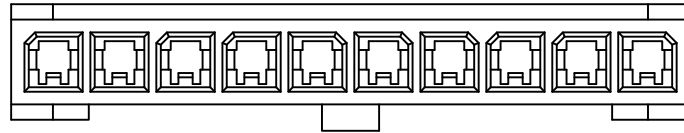


10P




3P

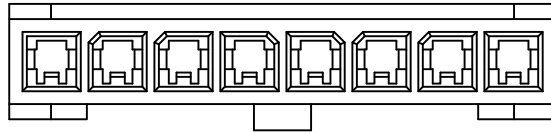


8P

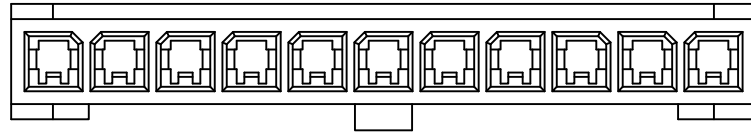


11P




4P

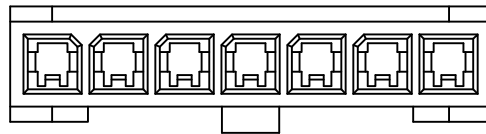


7P

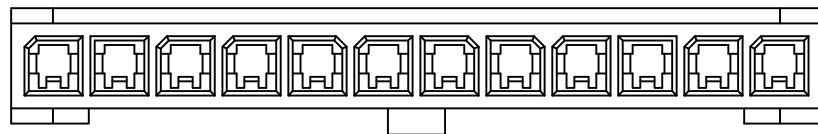

12P

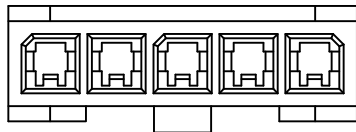

5P

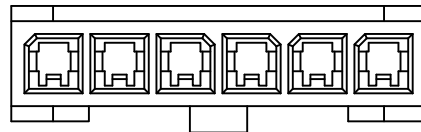

6P

**CJTconn** CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	2 of 2
DRWN	CHK'D	APPR
Xu Lei	Diankui Wan	Jack Yin

TITLE  
**3.00mm Pitch  
Single Row Housing**

A3	CHANGE THE DRAWING	2022.01.14
A2	CHANGE THE DRAWING	2019.12.27
A1	MODIFY DRAWING	2019.09.20
A0	NEW RELEASE	2018.12.15
REV	DESCRIPTION	DATE

General Tolerances  
 x.x±0.25  
 x.xx±0.20  
 x.xxx±0.15  
 ANGLES ±1°

THIRD ANGLE  
PROJECTION

DRAWING NO.  
**C3030HMA-XP**

REV  
A3