


**SPECIFICATIONS:**



Current rating: 0.5A AC,DC  
 Voltage rating: 30V AC,DC  
 Temperature range: -40°C ~ +105°C  
 Contact resistance: 20mΩ Max.  
 Insulation resistance: 100MΩ Min.  
 Withstanding voltage: 200V AC/minute  
 Housing: Nylon 6T, UL94V-0(Beige)  
 Terminal: Phosphor Bronze/Tin over Nickel

**Ordering Information & Dimensions**

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	0.80	3.80	13P	9.60	12.60
3P	1.60	4.60	14P	10.40	13.40
4P	2.40	5.40	15P	11.20	14.20
5P	3.20	6.20	16P	12.00	15.00
6P	4.00	7.00	17P	12.80	15.80
7P	4.80	7.80	18P	13.60	16.60
8P	5.60	8.60	19P	14.40	17.40
9P	6.40	9.40	20P	15.20	18.20
10P	7.20	10.20	21P	16.00	19.00
11P	8.00	11.00	22P	16.80	19.80
12P	8.80	11.80			

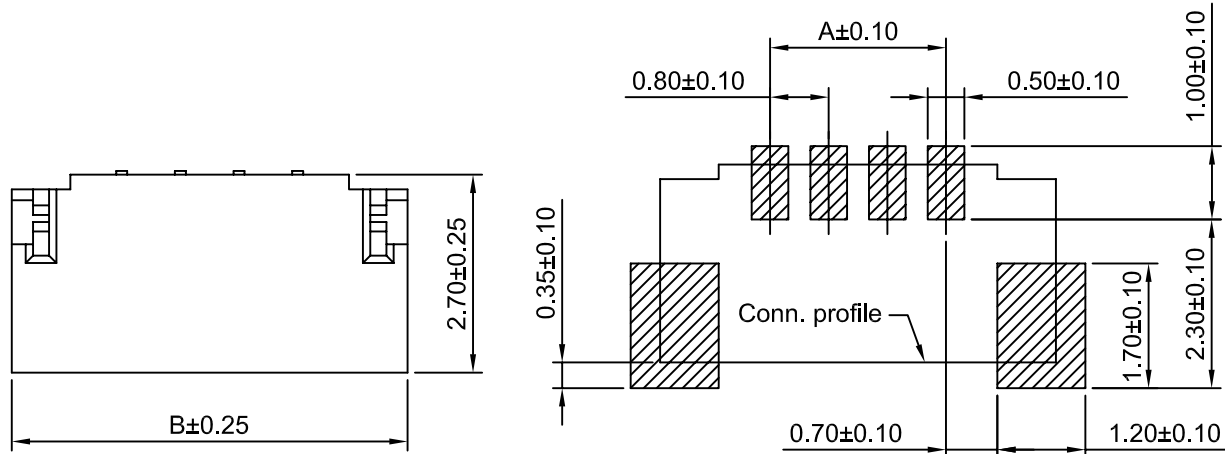

P.C.B. LAYOUT

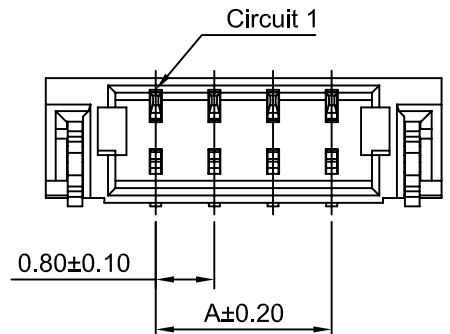

**CJTconn** CHANGJIANG CONNECTORS CO.,LTD.

Unit mm	Scale 10:1	Sheet 1 of 1	Title : <b>0.80mm PITCH</b>  <b>90° WAFER - SMT TYPE</b>
Draw BY: Jack Yin	Approved : GONGYB		
General Tolerance			
A0	NEW RELEEASE	2005.07.01	DRAW NO : D0801WR-S-XP
REV	DESCRIPTION	DATE	

x.x≤0.25  
 x.xx≤0.20  
 x.xxx≤0.15

ANGLE±

REV A0