


SPECIFICATIONS:



Current rating: 0.5A AC,DC
 Voltage rating: 30V AC,DC
 Temperature range: -40°C ~ +105°C
 Contact resistance: 20mΩ Max.
 Insulation resistance: 100MΩ Min.
 Withstanding voltage: 200V AC/minute
 Housing: Nylon 6T, UL94V-0(Beige)
 Terminal: Phosphor Bronze/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	0.80	3.80	13P	9.60	12.60
3P	1.60	4.60	14P	10.40	13.40
4P	2.40	5.40	15P	11.20	14.20
5P	3.20	6.20	16P	12.00	15.00
6P	4.00	7.00	17P	12.80	15.80
7P	4.80	7.80	18P	13.60	16.60
8P	5.60	8.60	19P	14.40	17.40
9P	6.40	9.40	20P	15.20	18.20
10P	7.20	10.20	21P	16.00	19.00
11P	8.00	11.00	22P	16.80	19.80
12P	8.80	11.80			

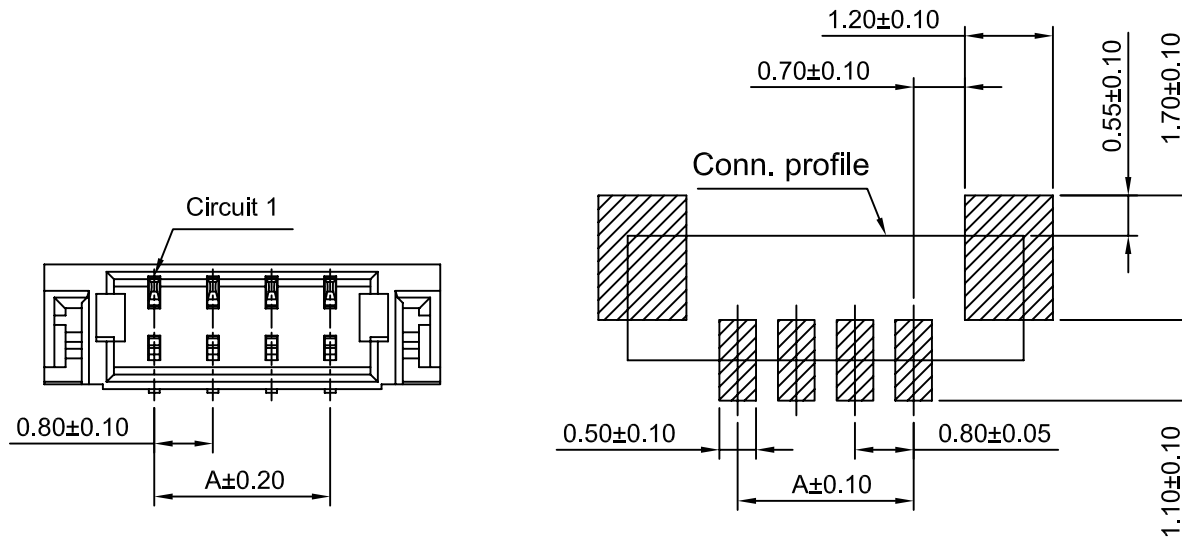

P.C.B. LAYOUT

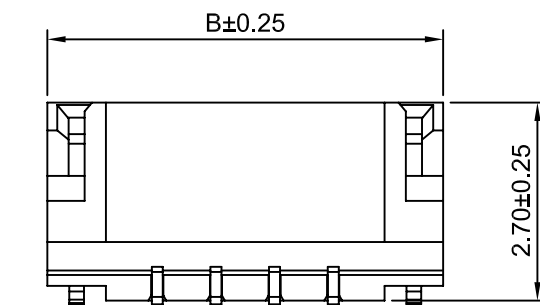

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	10:1	1 of 1

Draw BY:	Approved :
Jack Yin	GONGYB

General Tolerance

x.x≤0.25	ANGLE±
x.xx≤0.20	
x.xxx≤0.15	

Title : 0.80mm PITCH
 180° WAFER -SMT TYPE

DRAW NO : D0801WV-S-XP REV A0

A0	NEW RELEEASE	2005.07.01
REV	DESCRIPTION	DATE