

A2005WVA-S-2x12P-H15 ✓有效

CJTconn




A2005系列

2.00mm(.079in)Pitch , Header , Header , Brass , 1μin (0.025μm) , Gold (Au) Plating , Dual Row , 24 Circuit , Nylon 6T UL94V-0 , Black , Cap Reel

[在长江官网查看 >](#)

线对板连接器(WIRE TO BOARD)-A2005板对板连接器(BOARD TO BOARD)-A2005

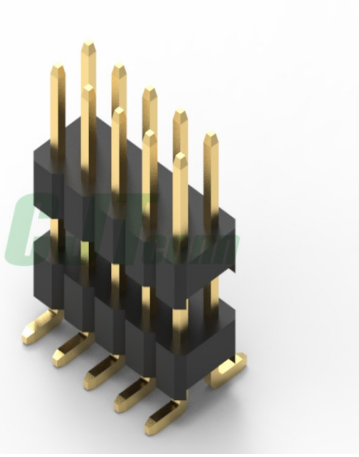

符合欧盟 RoHS (2011/65/EU)指令要求
符合欧盟ELV指令 2000/53/EC要求

产品小类 **A2005系列**
产品间距 **2.00mm(.079in)**
电镀厚度 **1μin (0.025μm)**

材料-树脂与可燃性 **Nylon 6T UL94V-0**
电镀 **Gold (Au) Plating**

产品类型特性

产品大类	线对板连接器(WIRE TO BOARD) 板对板连接器(BOARD TO BOARD)
产品间距	2.00mm(.079in)
产品类型	Header
产品小类	A2005系列
部件属性	Header

电气特征

工作电压(VAC/DC)	250
每触点额定电流(Max)(A)	2

规格特性

材料-树脂与阻燃性	Nylon 6T UL94V-0
颜色-树脂	Black
材料-金属	Brass
电镀	Gold (Au) Plating
电镀厚度	1μin (0.025μm)

结构特性

行数	2
电路数	24

机械特性

方向	Vertical
面板安装式	No
终端界面-类型	SMD

使用环境

















运行温度范围	-40°C~105°C
--------	-------------


行业标准

UL	E326732
----	---------

cUL	E326732
-----	---------

所有配套产品

 <p>A2005H-2x12P-66 2.00mm(.079in)Pitch, Receptacle, Housing, Dual Row, 24 Circuit, Black, Bag</p> <p>浏览1个产品</p>	 <p>A2005HWR-S-2x12P 2.00mm(.079in)Pitch, Header, Header, Phosphor Bronze, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Cap Reel</p> <p>浏览10个产品</p>
 <p>A2005HWV-S-2x12P 2.00mm(.079in)Pitch, Header, Header, Phosphor Bronze, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Cap Reel</p> <p>浏览90个产品</p>	 <p>A2005HWR-2x12P-6T 2.00mm(.079in)Pitch, Header, Header, Brass, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag</p> <p>浏览10个产品</p>
 <p>A2005HWV-2x12P-6T 2.00mm(.079in)Pitch, Header, Header, Brass, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag</p> <p>浏览90个产品</p>	 <p>A2005HWR-S-2x12P-Y 2.00mm(.079in)Pitch, Header, Header, Brass, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Cap Reel</p> <p>浏览10个产品</p>
 <p>A2005HWR-S-F-2x12P 2.00mm(.079in)Pitch, Header, Header, Phosphor Bronze, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Cap Reel</p> <p>浏览10个产品</p>	 <p>A2005HWRA-2x12P-6T 2.00mm(.079in)Pitch, Header, Header, Brass, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag</p> <p>浏览20个产品</p>
 <p>A2005HWRE-2x12P-6T 2.00mm(.079in)Pitch, Header, Header, Phosphor Bronze, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag</p> <p>浏览10个产品</p>	 <p>A2005HWV-S-2x12P-Y 2.00mm(.079in)Pitch, Header, Header, Brass, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Cap Reel</p> <p>浏览10个产品</p>
 <p>A2005HWV-S-F-2x12P 2.00mm(.079in)Pitch, Header, Header, Phosphor Bronze, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Cap Reel</p> <p>浏览45个产品</p>	 <p>A2005HWVA-2x12P-6T 2.00mm(.079in)Pitch, Header, Header, Brass, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag</p> <p>浏览20个产品</p>
 <p>A2005HWVB-2x12P-6T 2.00mm(.079in)Pitch, Header, Header, Phosphor Bronze, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag</p> <p>浏览80个产品</p>	 <p>A2005HWVE-2x12P-6T 2.00mm(.079in)Pitch, Header, Header, Phosphor Bronze, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag</p> <p>浏览10个产品</p>
 <p>A2005HWR-2x12P-Y-6T 2.00mm(.079in)Pitch, Header, Header, Brass, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag</p> <p>浏览10个产品</p>	 <p>A2005HWV-2x12P-Y-6T 2.00mm(.079in)Pitch, Header, Header, Brass, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag</p> <p>浏览20个产品</p>




A2005HWV-S-F-2x12P-Y

2.00mm(.079in)Pitch, Header, Header, Brass, 1µin (0.025 µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Cap Reel

[浏览10个产品](#)

配对




A2005HWV-N-2x12P-W40-6T

2.00mm(.079in)Pitch, Header, Header, Phosphor Bronze, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag

[浏览10个产品](#)

配对



A2005HWVA-N-2x12P-W40-6T

2.00mm(.079in)Pitch, Header, Header, Phosphor Bronze, 1µin (0.025µm), Gold (Au) Plating, Dual Row, 24 Circuit, Nylon 6T UL94V-0, Black, Bag

[浏览10个产品](#)

配对

[显示更多 →](#)

文档

[销售用图纸\(PDF\) →](#)

[系列图\(PDF\) →](#)

[产品规格书\(PDF\) →](#)

[线束定制加工 →](#)

[免费申请样品 →](#)

[配套部件及工具 →](#)

产品合规性

符合欧盟 RoHS (2011/65/EU)指令要求	符合
符合欧盟ELV指令 2000/53/EC要求	符合
中国电器电子产品有害物质限制使用管理办法 (China RoHS 2, 工业和信息化部第32号令)	没有超出阈值的受限材料
欧盟REACH法规(EC No.1907/2006)	不含有REACH SVHC
免责声明	此信息基于对供应商的合理调查以及CJT对供应商提供的信息的现有认知。此信息可能发生变化。经CJT确认符合欧盟RoHS的产品编号, 产品均质材料中铅、六价铬、汞、PBB、PBDE、DEHP、BBP、DBP和DIBP的最大浓度不超过0.1%, 镉的最大浓度不超过0.01%。元器件符合通常无需CE标记。经CJT确认符合欧盟ELV指令的产品编号, 产品均质材料中铅、六价铬和汞的最大浓度不超过0.1%, 镉的最大浓度不超过0.01% (按重量计算), 或符合指令2000/53/EC。