
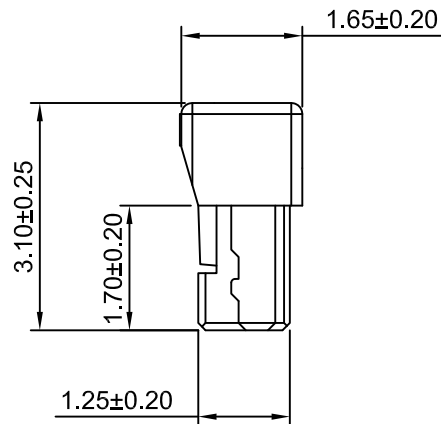



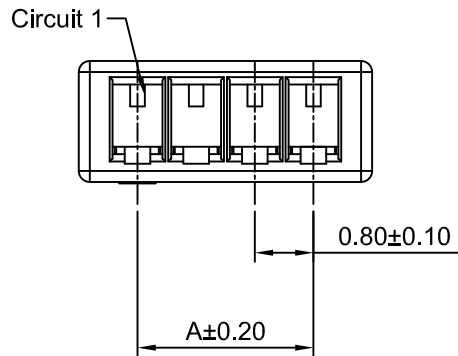

Ordering Information:

A0801H-XP-2 - ***
1 2

1.Part No.

2.Material:

(blank) - LCP,UL94V-0

46 - Nylon 46,UL94V-0

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 30V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 200V AC/minute

Material: LCP , UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	0.80	2.40	12P	8.80	10.40
3P	1.60	3.20	13P	9.60	11.20
4P	2.40	4.00	14P	10.40	12.00
5P	3.20	4.80	15P	11.20	12.80
6P	4.00	5.60	16P	12.00	13.60
7P	4.80	6.40	17P	12.80	14.40
8P	5.60	7.20	18P	13.60	15.20
9P	6.40	8.00	19P	14.40	16.00
10P	7.20	8.80	20P	15.20	16.80
11P	8.00	9.60			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	10:1	1 of 1
Draw By:		Approved :
Dlankul Wan		Jack Yin

Title :

0.80mm Pitch

Housing

General Tolerance		
A1	ADD THE INFORMATION	2019.06.17
A0	NEW RELEASE	2015.03.23
REV	DESCRIPTION	DATE

x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

DRAW NO : A0801H-XP-2

REV
A1