

Ordering Information:

A0801WRA-S-XP - **
1 2

1.Part No.

2.Finish:

(Blank): Tin over Nickel

G:Gold Flash (Au:1u")

G3: Gold over Nickel(Au:3u")

G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

SPECIFICATIONS:

Current Rating:1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 200V AC/minute





Pin Material: Phosphor Bronze

Solder tabs: Brass/Tin over Nickel

Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
A0801WRA-S-2P	0.80	3.80	3.20
A0801WRA-S-3P	1.60	4.60	4.00
A0801WRA-S-4P	2.40	5.40	4.80
A0801WRA-S-5P	3.20	6.20	5.60
A0801WRA-S-6P	4.00	7.00	6.40
A0801WRA-S-7P	4.80	7.80	7.20
A0801WRA-S-8P	5.60	8.60	8.00
A0801WRA-S-9P	6.40	9.40	8.80
A0801WRA-S-10P	7.20	10.20	9.60
A0801WRA-S-11P	8.00	11.00	10.40
A0801WRA-S-12P	8.80	11.80	11.20
A0801WRA-S-13P	9.60	12.60	12.00
A0801WRA-S-14P	10.40	13.40	12.80
A0801WRA-S-15P	11.20	14.20	13.60
A0801WRA-S-16P	12.00	15.00	14.40
A0801WRA-S-17P	12.80	15.80	15.20
A0801WRA-S-18P	13.60	16.60	16.00
A0801WRA-S-19P	14.40	17.40	16.80
A0801WRA-S-20P	15.20	18.20	17.60

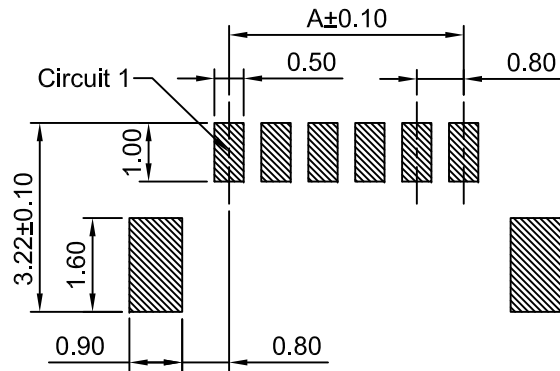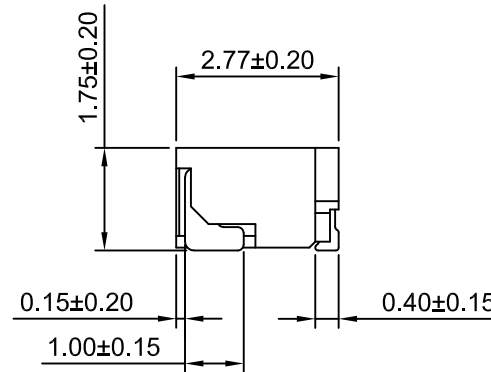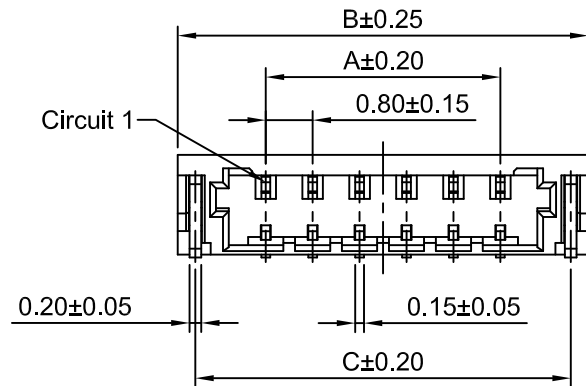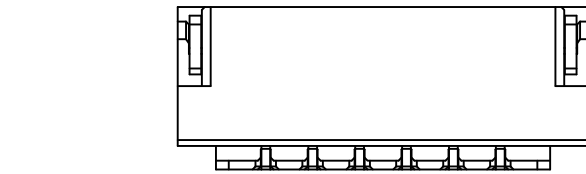

P.C.B LAYOUT
TOLERANCE:±0.05

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 0.80mm PITCH RIGHT-ANGLE DUAL ROW WAFER - SMD TYPE	
mm	5:1	1 of 1		
DRAWN	CHK'D	APPR		
WenMin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION 	DRAWING NO.	
x.xx±0.25			A0801WRA-S-XP	
x.xxx±0.20				
x.xxxx±0.15				
ANGLES ±1°			REV A0	