
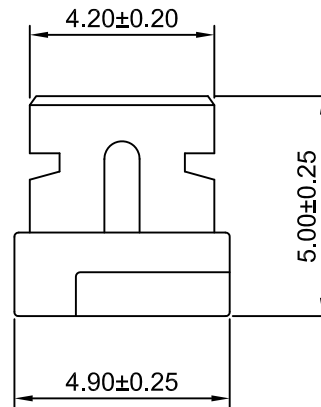
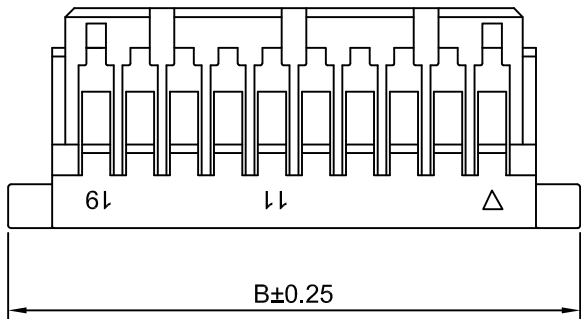


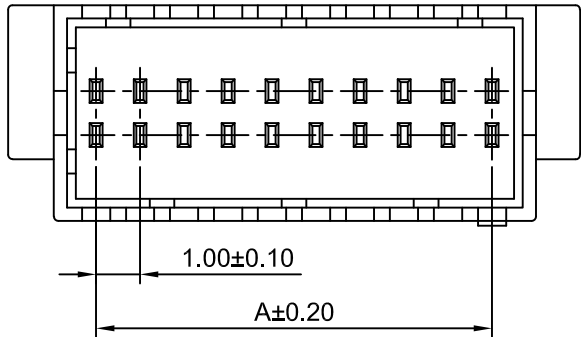

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PBT,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1002H-2x5P	4.00	8.00
A1002H-2x6P	5.00	9.00
A1002H-2x8P	7.00	11.00
A1002H-2x10P	9.00	13.00
A1002H-2x15P	14.00	18.00
A1002H-2x20P	19.00	23.00
A1002H-2x25P	24.00	28.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		6:1		1 of 1			
DRAWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin		1.00mm PITCH DUAL ROW HUSING	
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				A1002H-2xXP			