
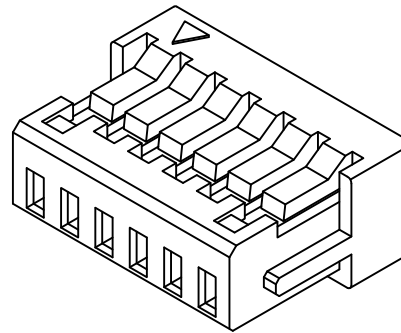



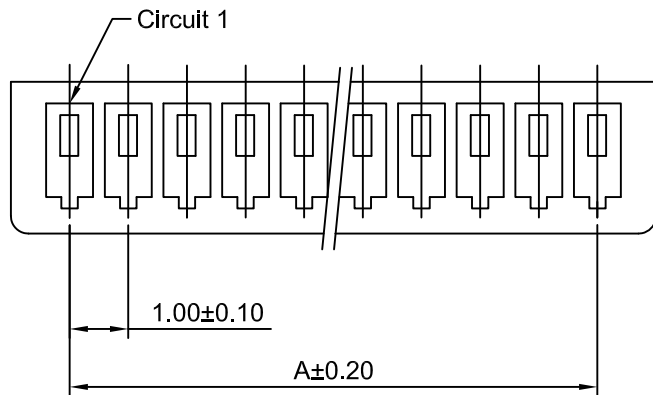


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20MΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: PBT,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1002H-2P-2	1.00	3.00	2.40
A1002H-3P-2	2.00	4.00	3.40
A1002H-4P-2	3.00	5.00	4.40
A1002H-5P-2	4.00	6.00	5.40
A1002H-6P-2	5.00	7.00	6.40
A1002H-7P-2	6.00	8.00	7.40
A1002H-8P-2	7.00	9.00	8.40
A1002H-9P-2	8.00	10.00	9.40
A1002H-10P-2	9.00	11.00	10.40
A1002H-11P-2	10.00	12.00	11.40
A1002H-12P-2	11.00	13.00	12.40
A1002H-13P-2	12.00	14.00	13.40
A1002H-14P-2	13.00	15.00	14.40
A1002H-15P-2	14.00	16.00	15.40
A1002H-16P-2	15.00	17.00	16.40
A1002H-17P-2	16.00	18.00	17.40
A1002H-18P-2	17.00	19.00	18.40
A1002H-19P-2	18.00	20.00	19.40
A1002H-20P-2	19.00	21.00	20.40

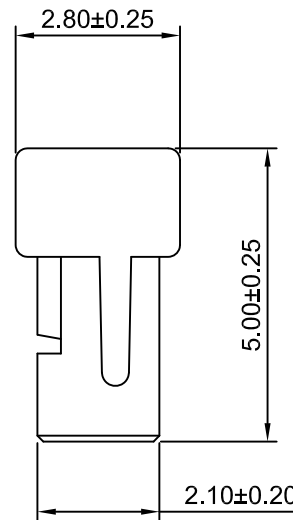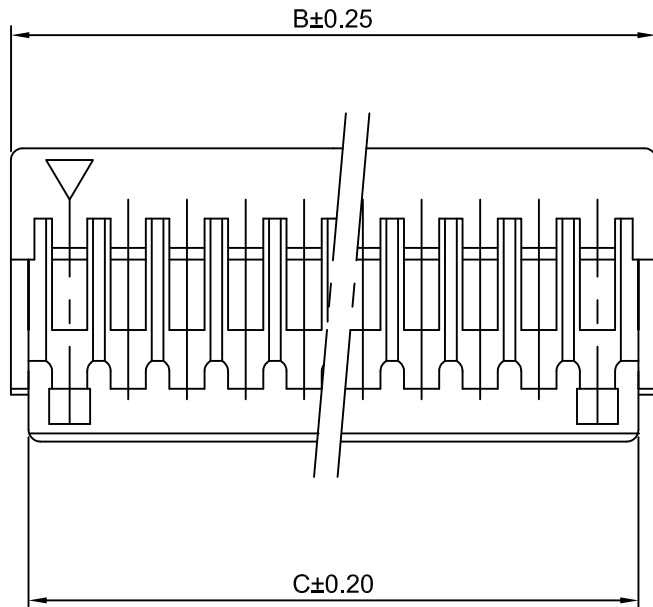

CJT

conn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	8:1	1 of 1	1.00mm pitch Single Row Housing	
DRAWN	CHK'D	APPR		
Halsen Li	Dlankul Wan	Jack Yln		
General Tolerances THIRD ANGLE PROJECTION			DRAWING NO. A1002H-XP-2	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
REV	DESCRIPTION	DATE	A0 NEW RELEASE 2005.05.10 REV A0	