




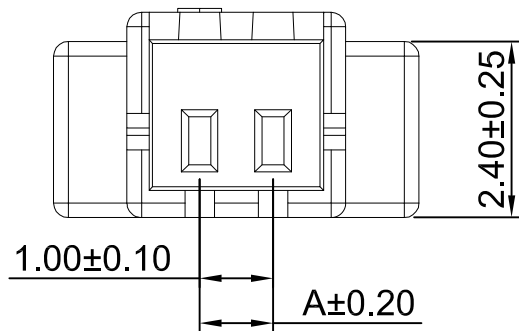


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A1002H-2P	1.00	4.90	2.90	2.38
A1002H-3P	2.00	5.90	3.90	3.38
A1002H-4P	3.00	6.90	4.90	4.38
A1002H-5P	4.00	7.90	5.90	5.38
A1002H-6P	5.00	8.90	6.90	6.38
A1002H-7P	6.00	9.90	7.90	7.38
A1002H-8P	7.00	10.90	8.90	8.38
A1002H-9P	8.00	11.90	9.90	9.38
A1002H-10P	9.00	12.90	10.90	10.38
A1002H-11P	10.00	13.90	11.90	11.38
A1002H-12P	11.00	14.90	12.90	12.38
A1002H-13P	12.00	15.90	13.90	13.38
A1002H-14P	13.00	16.90	14.90	14.38
A1002H-15P	14.00	17.90	15.90	15.38
A1002H-16P	15.00	18.90	16.90	16.38
A1002H-17P	16.00	19.90	17.90	17.38
A1002H-18P	17.00	20.90	18.90	18.38
A1002H-19P	18.00	21.90	19.90	19.38
A1002H-20P	19.00	22.90	20.90	20.38
A1002H-25P	24.00	27.90	25.90	25.38
A1002H-30P	29.00	32.90	30.90	30.38

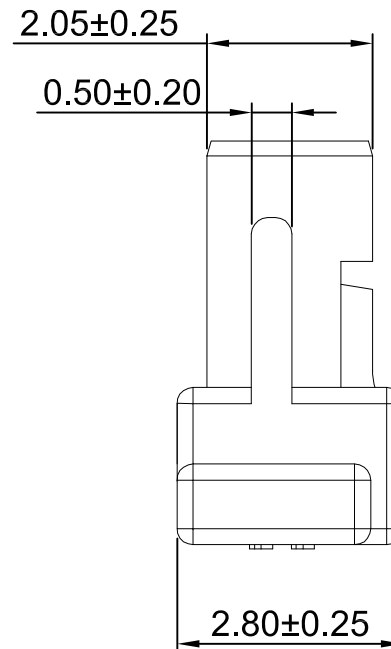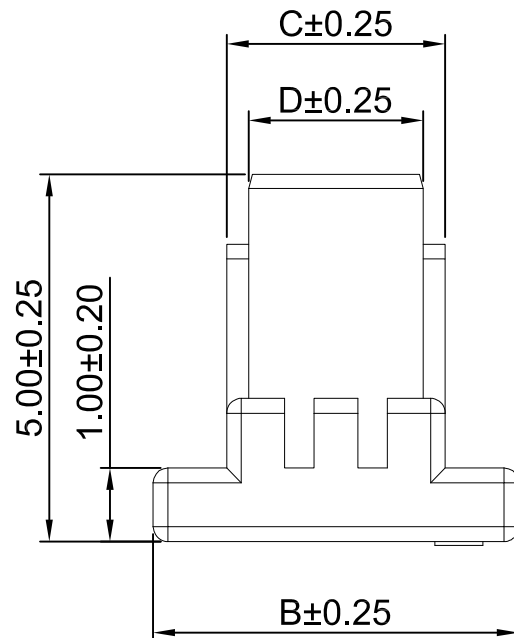

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	10:1	1 of 1	1.00mm PITCH HUSING WITH PROTUSIONS		
DRAWN	CHK'D	APPR			
Chengbiao Ye	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.	
x,x±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°					
				REV A0	