




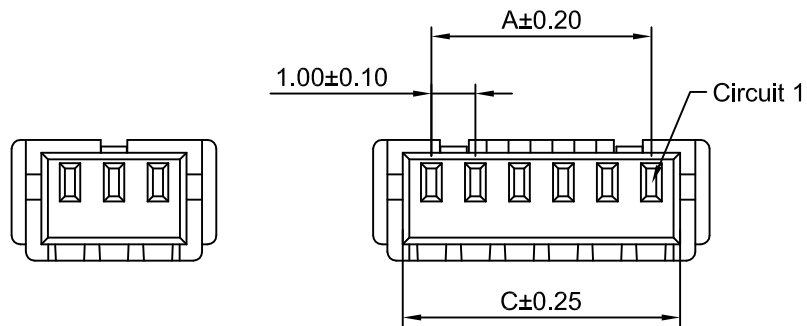





2P~3P

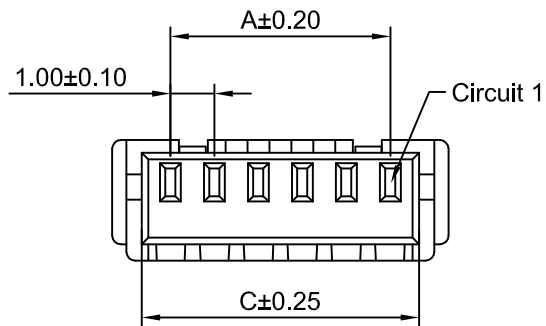

4P~20P



First Pin Mark

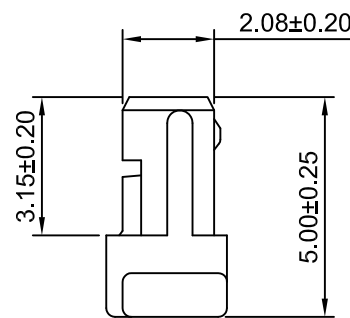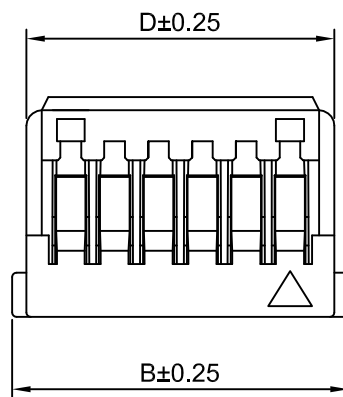

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)				
	A	B	C	D	E
A1002HF-2P	1.00	3.65	2.30	3.00	---
A1002HF-3P	2.00	4.65	3.30	4.00	---
A1002HF-4P	3.00	5.65	4.30	5.00	2.00
A1002HF-5P	4.00	6.65	5.30	6.00	3.00
A1002HF-6P	5.00	7.65	6.30	7.00	4.00
A1002HF-7P	6.00	8.65	7.30	8.00	5.00
A1002HF-8P	7.00	9.65	8.30	9.00	6.00
A1002HF-9P	8.00	10.65	9.30	10.00	7.00
A1002HF-10P	9.00	11.65	10.30	11.00	8.00
A1002HF-11P	10.00	12.65	11.30	12.00	9.00
A1002HF-12P	11.00	13.65	12.30	13.00	10.00
A1002HF-13P	12.00	14.65	13.30	14.00	11.00
A1002HF-14P	13.00	15.65	14.30	15.00	12.00
A1002HF-15P	14.00	16.65	15.30	16.00	13.00
A1002HF-16P	15.00	17.65	16.30	17.00	14.00
A1002HF-17P	16.00	18.65	17.30	18.00	15.00
A1002HF-18P	17.00	19.65	18.30	19.00	16.00
A1002HF-19P	18.00	20.65	19.30	20.00	17.00
A1002HF-20P	19.00	21.65	20.30	21.00	18.00

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1		
DRWN	CHK'D	APPR	1.00mm PITCH HOUSING	
Dengchun Yi	Dlankut Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
		A1002HF-XP		REV A1