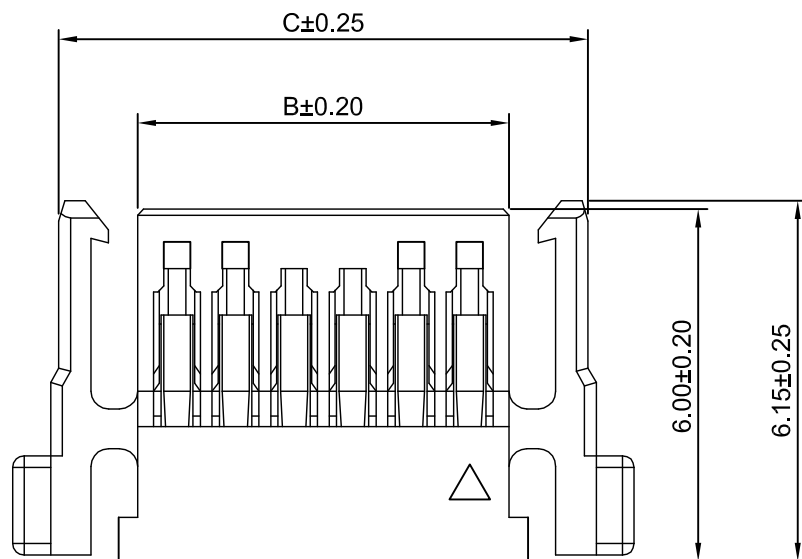
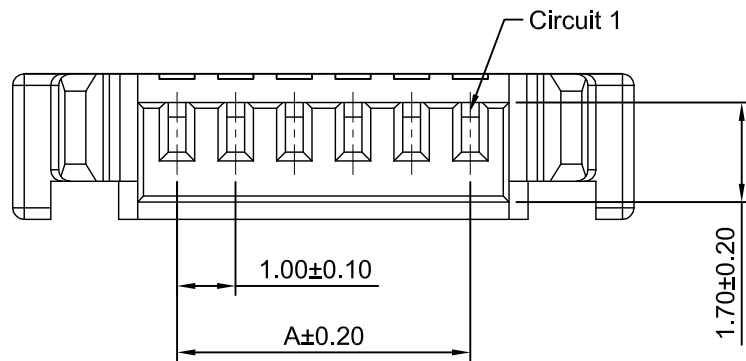


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1002HG-2P	1.00	2.40	5.00
A1002HG-3P	2.00	3.40	6.00
A1002HG-4P	3.00	4.40	7.00
A1002HG-5P	4.00	5.40	8.00
A1002HG-6P	5.00	6.40	9.00
A1002HG-7P	6.00	7.40	10.00
A1002HG-8P	7.00	8.40	11.00
A1002HG-9P	8.00	9.40	12.00
A1002HG-10P	9.00	10.40	13.00
A1002HG-11P	10.00	11.40	14.00
A1002HG-12P	11.00	12.40	15.00
A1002HG-13P	12.00	13.40	16.00
A1002HG-14P	13.00	14.40	17.00
A1002HG-15P	14.00	15.40	18.00
A1002HG-16P	15.00	16.40	19.00
A1002HG-17P	16.00	17.40	20.00
A1002HG-18P	17.00	18.40	21.00
A1002HG-19P	18.00	19.40	22.00
A1002HG-20P	19.00	20.40	23.00

A1	CHANGE THE DRAWING	2021.01.06
A0	NEW RELEASE	2013.04.11
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 1.00mm PITCH HOUSING
mm	1:1	1 of 1	
DRWN	CHK'D	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	DRAWING NO. A1002HG-XP
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A1