
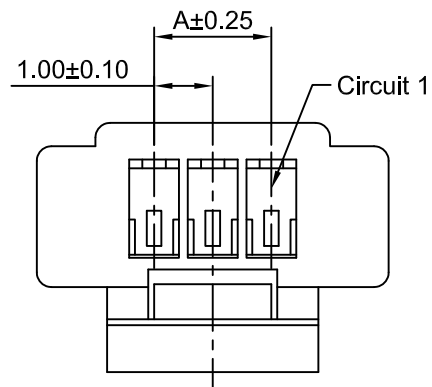
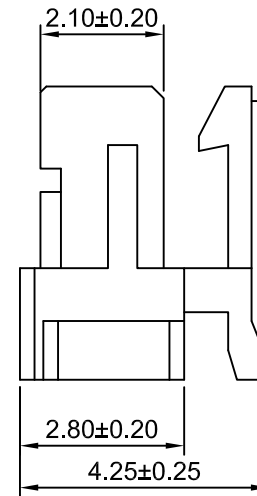


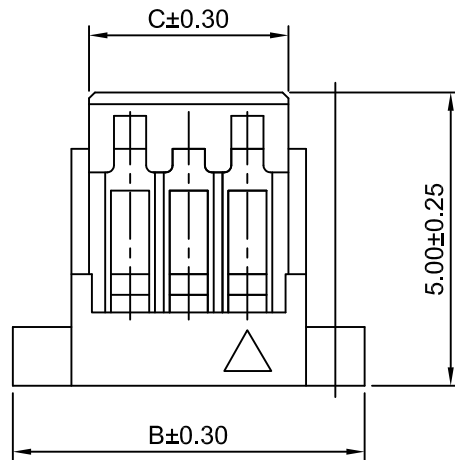

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $20\text{m}\Omega$ Max.

Insulation Resistance: $100\text{M}\Omega$ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1002HK-2P	1.00	5.00	2.40
A1002HK-3P	2.00	6.00	3.40
A1002HK-4P	3.00	7.00	4.40
A1002HK-5P	4.00	8.00	5.40
A1002HK-6P	5.00	9.00	6.40
A1002HK-7P	6.00	10.00	7.40
A1002HK-8P	7.00	11.00	8.40
A1002HK-9P	8.00	12.00	9.40
A1002HK-10P	9.00	13.00	10.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHK'D	APPR	1.00mm PITCH HUSING	
WenmIn Luo	DlanKut Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1002HK-XP	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2020.07.01
REV	DESCRIPTION	DATE