

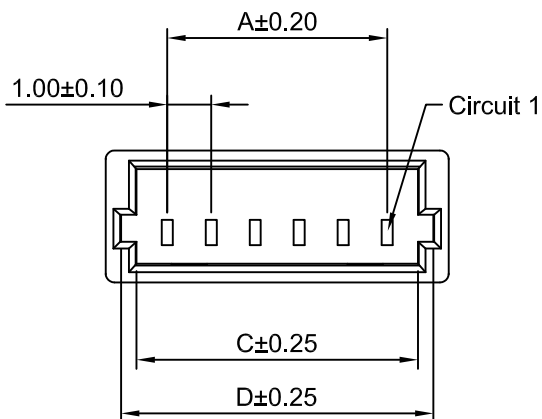
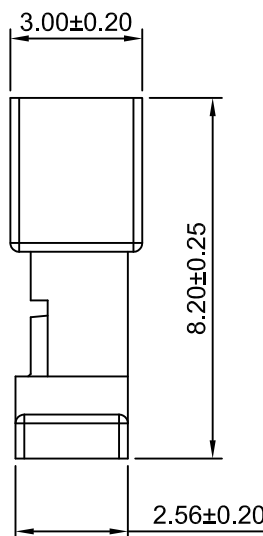
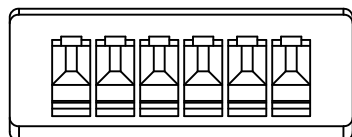



2P~3P

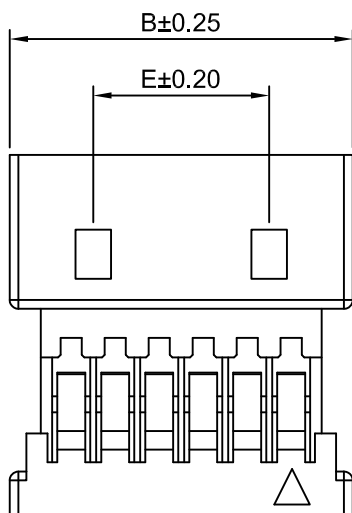

4P~20P

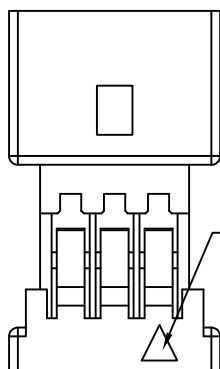

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)				
	A	B	C	D	E
A1002HM-2P	1.00	3.80	2.40	3.10	---
A1002HM-3P	2.00	4.80	3.40	4.10	---
A1002HM-4P	3.00	5.80	4.40	5.10	2.00
A1002HM-5P	4.00	6.80	5.40	6.10	3.00
A1002HM-6P	5.00	7.80	6.40	7.10	4.00
A1002HM-7P	6.00	8.80	7.40	8.10	5.00
A1002HM-8P	7.00	9.80	8.40	9.10	6.00
A1002HM-9P	8.00	10.80	9.40	10.10	7.00
A1002HM-10P	9.00	11.80	10.40	11.10	8.00
A1002HM-11P	10.00	12.80	11.40	12.10	9.00
A1002HM-12P	11.00	13.80	12.40	13.10	10.00
A1002HM-13P	12.00	14.80	13.40	14.10	11.00
A1002HM-14P	13.00	15.80	14.40	15.10	12.00
A1002HM-15P	14.00	16.80	15.40	16.10	13.00
A1002HM-16P	15.00	17.80	16.40	17.10	14.00
A1002HM-17P	16.00	18.80	17.40	18.10	15.00
A1002HM-18P	17.00	19.80	18.40	19.10	16.00
A1002HM-19P	18.00	20.80	19.40	20.10	17.00
A1002HM-20P	19.00	21.80	20.40	21.10	18.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1		
DRWN	CHK'D	APPR	1.00mm PITCH HOUSING	
Dengchun Yi	Dlankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1002HM-XP	REV A1
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2011.05.13
REV	DESCRIPTION	DATE