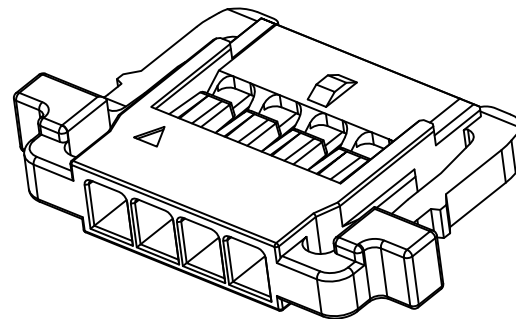
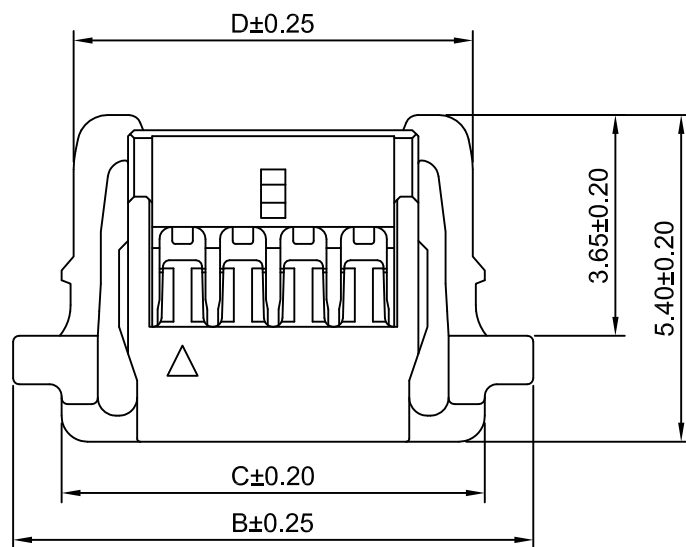
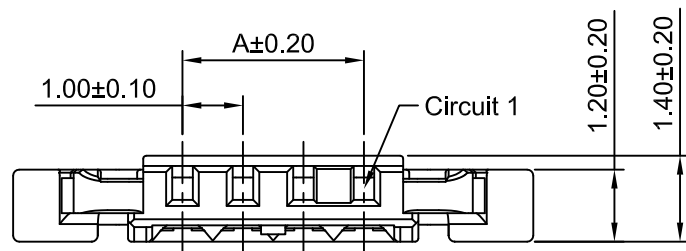


SPECIFICATIONS:

Current Rating: 2.5A AC,DC (MAX)
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			
	A	B	C	D
A1002HN-2P	1.00	6.60	5.00	4.60
A1002HN-3P	2.00	7.60	6.00	5.60
A1002HN-4P	3.00	8.60	7.00	6.60
A1002HN-5P	4.00	9.60	8.00	7.60
A1002HN-6P	5.00	10.60	9.00	8.60
A1002HN-7P	6.00	11.60	10.00	9.60
A1002HN-8P	7.00	12.60	11.00	10.60
A1002HN-9P	8.00	13.60	12.00	11.60
A1002HN-10P	9.00	14.60	13.00	12.60
A1002HN-11P	10.00	15.60	14.00	13.60
A1002HN-12P	11.00	16.60	15.00	14.60

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 1.00mm PITCH HOUSING	
mm	5:1	1 of 1		
DRAWN	CHK'D	APPR		
WenMin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A1
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				
			A1002HN-XP	