

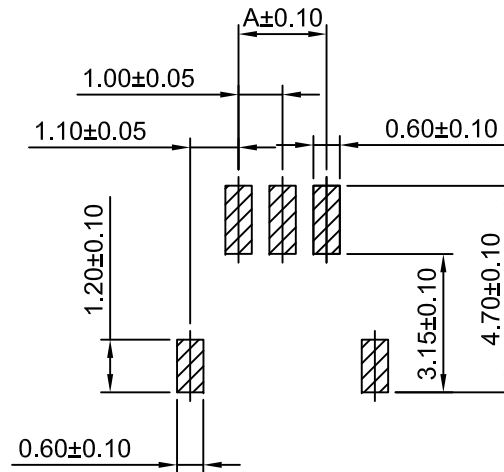
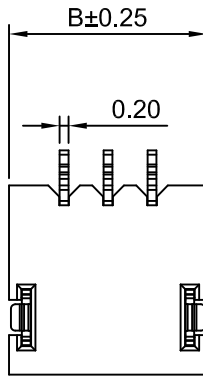
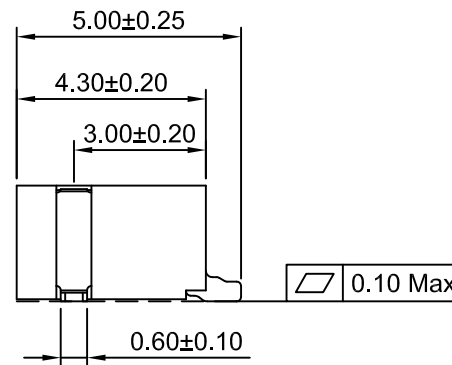


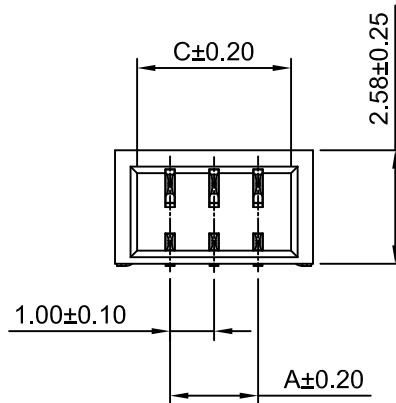

P.C.B LAYOUT



SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Matte Tin over Nickel
Solder Tabs: Brass/Matte Tin over Nickel
Material: Nylon 6T,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.00	3.50	2.50	12P	11.00	13.50	12.50
3P	2.00	4.50	3.50	13P	12.00	14.50	13.50
4P	3.00	5.50	4.50	14P	13.00	15.50	14.50
5P	4.00	6.50	5.50	15P	14.00	16.50	15.50
6P	5.00	7.50	6.50	16P	15.00	17.50	16.50
7P	6.00	8.50	7.50	17P	16.00	18.50	17.50
8P	7.00	9.50	8.50	18P	17.00	19.50	18.50
9P	8.00	10.50	9.50	19P	18.00	20.50	19.50
10P	9.00	11.50	10.50	20P	19.00	21.50	20.50
11P	10.00	12.50	11.50				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1	1.00mm PITCH RIGHT-ANGLE WAFER - SMD TYPE	
DRAWN	CHK'D	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A1002WRA-S-XP	A0

A0	NEW RELEASE	2012.09.12
REV	DESCRIPTION	DATE