
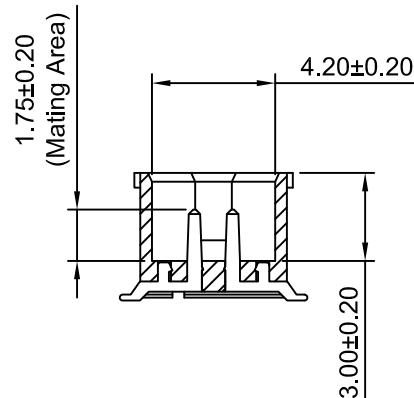
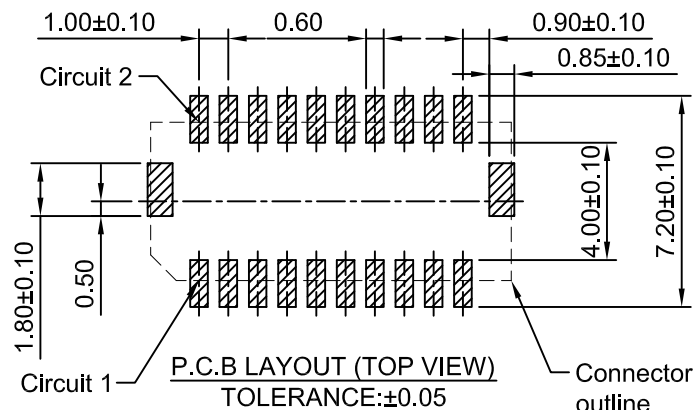
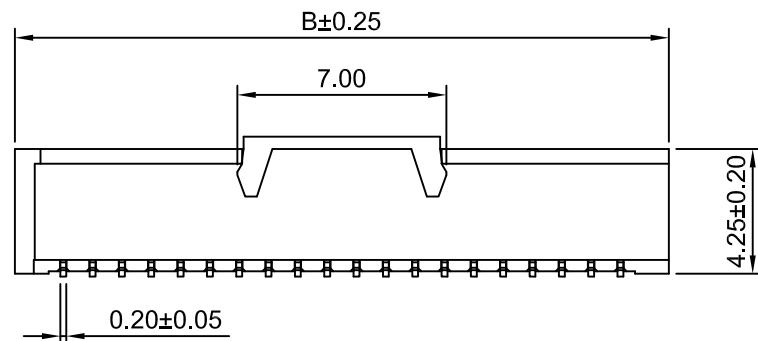


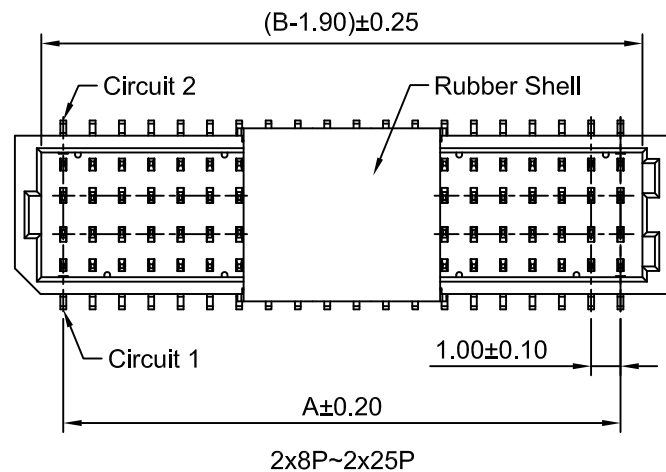

Ordering Information:

A1002WV-S-2xXP - ***

1.Part NO.

2.Finish:


(Blank): Gold over Nickel(Au:1u")

G3: Gold over Nickel(Au:3u")

G10: Gold over Nickel(Au:10u")

G15: Gold over Nickel(Au:15u")

G30: Gold over Nickel(Au:30u")



SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.



Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Gold over Nickel

Material: Nylon 6T,UL94V-0(Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1002WV-S-2x4P-G	3.00	6.30
A1002WV-S-2x5P-G	4.00	7.30
A1002WV-S-2x6P-G	5.00	8.30
A1002WV-S-2x7P-G	6.00	9.30
A1002WV-S-2x8P-G	7.00	10.30
A1002WV-S-2x10P-G	9.00	12.30
A1002WV-S-2x12P-G	11.00	14.30
A1002WV-S-2x15P-G	14.00	17.30
A1002WV-S-2x20P-G	19.00	22.30
A1002WV-S-2x25P-G	24.00	27.30

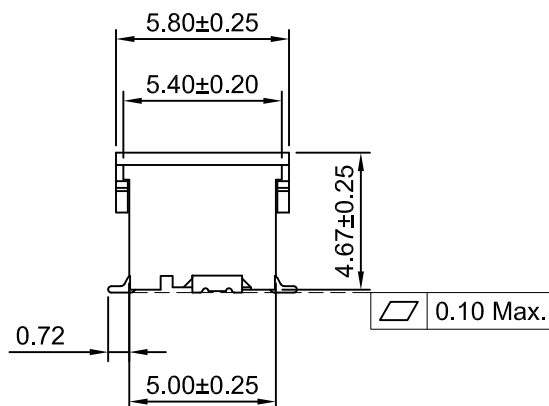

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	1.00mm PITCH VERTICAL DUAL ROW WAFER - SMD TYPE
DRWN	CHKD	APPR	DRAWING NO.
Wenmin Luo	Diankui Wan	Jack Yin	A1002WV-S-2xXP-G
General Tolerances	THIRD ANGLE PROJECTION		REV
x.x±0.25			A3
x.xx±0.20			
x.xxx±0.15			
ANGLES ±1°			

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2022.03.31
A2	CHANGE THE DRAWING	2021.12.29
A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2005.05.10