
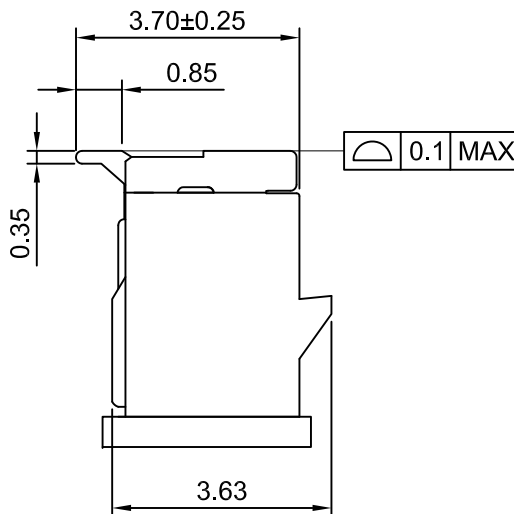


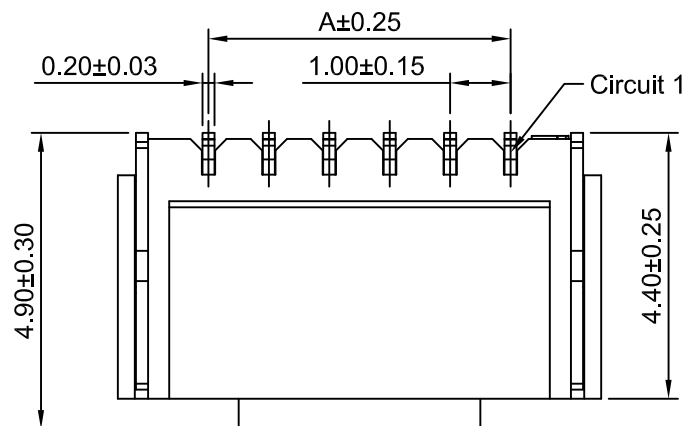

Ordering Information:

A1002WVK-S-XP - **
1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold Flash over Nickel (Au:1u")

G15: Gold over Nickel (Au:15u",Mating Area)

G30: Gold over Nickel (Au:30u",Mating Area)

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.



Withstanding Voltage: 500V AC/minute

PIN Material: Phosphor bronze

Material: LCP,UL94V-0(Natural)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1002WVK-S-2P	1.00	4.00	2.45
A1002WVK-S-3P	2.00	5.00	3.45
A1002WVK-S-4P	3.00	6.00	4.45
A1002WVK-S-5P	4.00	7.00	5.45
A1002WVK-S-6P	5.00	8.00	6.45
A1002WVK-S-7P	6.00	9.00	7.45
A1002WVK-S-8P	7.00	10.00	8.45
A1002WVK-S-9P	8.00	11.00	9.45
A1002WVK-S-10P	9.00	12.00	10.45
A1002WVK-S-11P	10.00	13.00	11.45
A1002WVK-S-12P	11.00	14.00	12.45
A1002WVK-S-13P	12.00	15.00	13.45
A1002WVK-S-14P	13.00	16.00	14.45
A1002WVK-S-15P	14.00	17.00	15.45
A1002WVK-S-16P	15.00	18.00	16.45
A1002WVK-S-20P	19.00	22.00	20.45

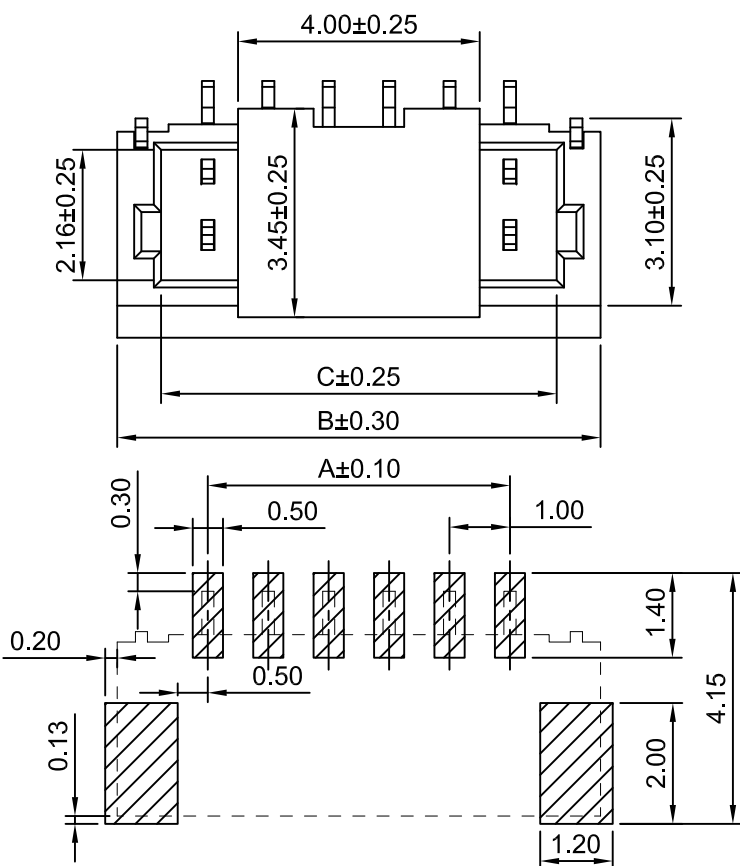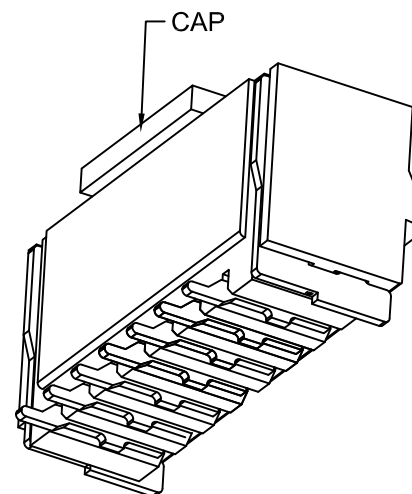

P.C.B LAYOUT(TOP VIEW)

TOLERANCE:±0.05

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 1.00mm PITCH VERTICAL WAFER - SMD TYPE	
mm		3:1		1 of 1			
DRWN		CHK'D		APPR			
Wenmin Luo		DianKuǐ Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
DRAWING NO.				REV			
A1002WVK-S-XP				A0			