
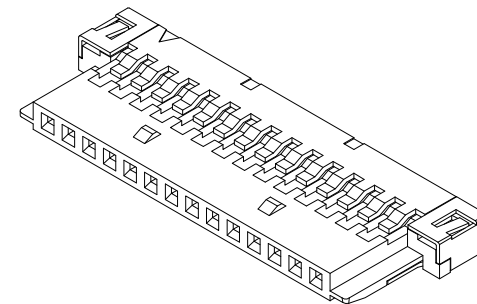
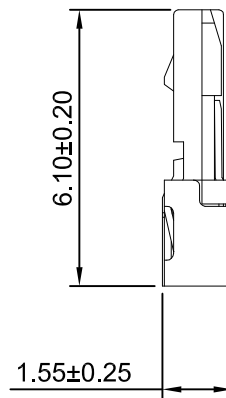
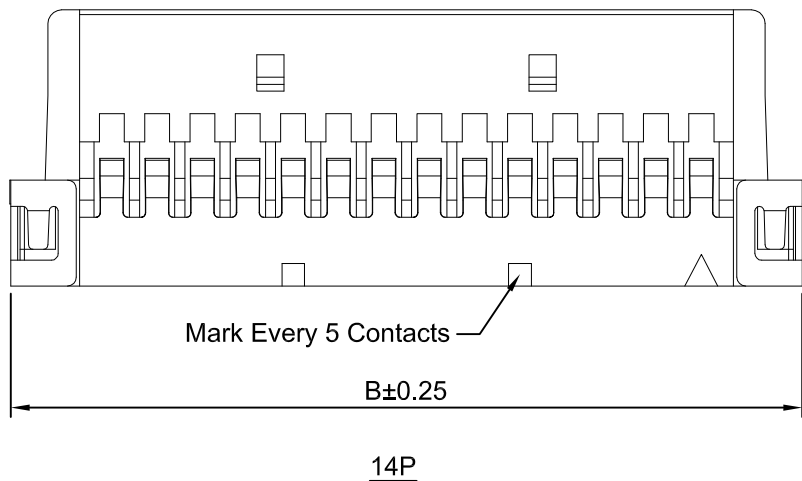


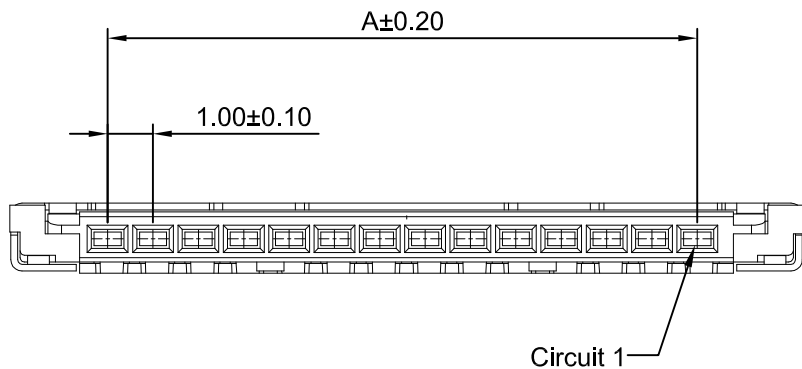


SPECIFICATIONS:

Current rating: 1A AC,DC
Voltage rating: 100V AC,DC
Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact resistance: 30M Ω Max.
Insulation resistance: 500M Ω Min.
Withstanding voltage: 500V AC/minute
Shell: Phosphor Bronze/Tin over Nickel
Material: Housing: Nylon 66, UL94V-0(Natural)


Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
8P	7.00	11.50	20P	19.00	23.50
14P	13.00	17.50	30P	29.00	33.50


CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	6:1	1 of 2	
DRAWN	CHK'D	APPR	1.00mm PITCH HOUSING
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1004H-XP
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			
A1	CHANGE THE DRAWING	2022.08.01	REV A1
A0	NEW RELEASE	2019.05.28	
REV	DESCRIPTION	DATE	

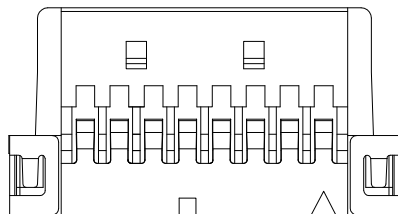


8P

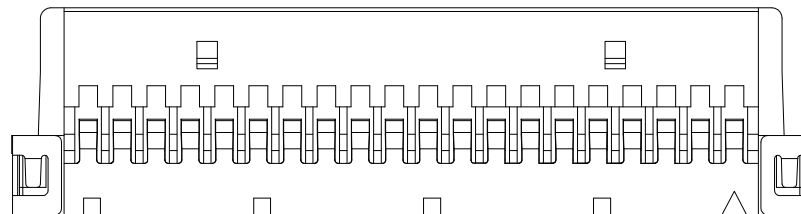

20P

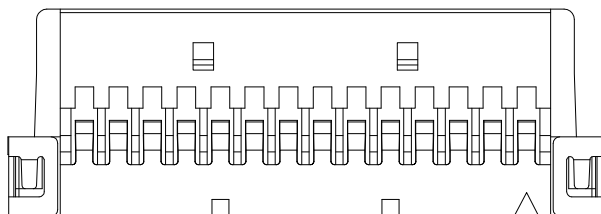

14P

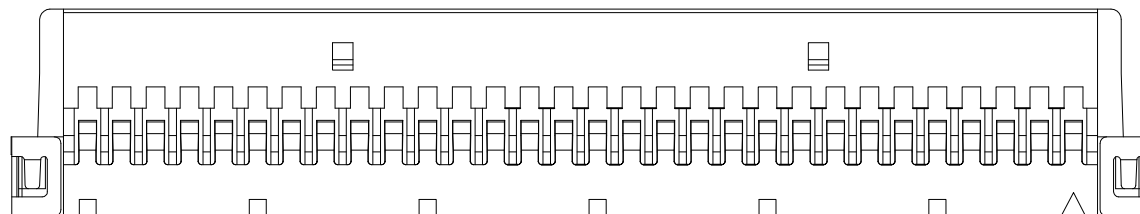

30P

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 1.00mm PITCH HOUSING	
mm	5:1	2 of 1		
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A1
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				
			A1004H-XP	

A1	CHANGE THE DRAWING	2022.08.01
A0	NEW RELEASE	2019.05.28
REV	DESCRIPTION	DATE

REV
A1