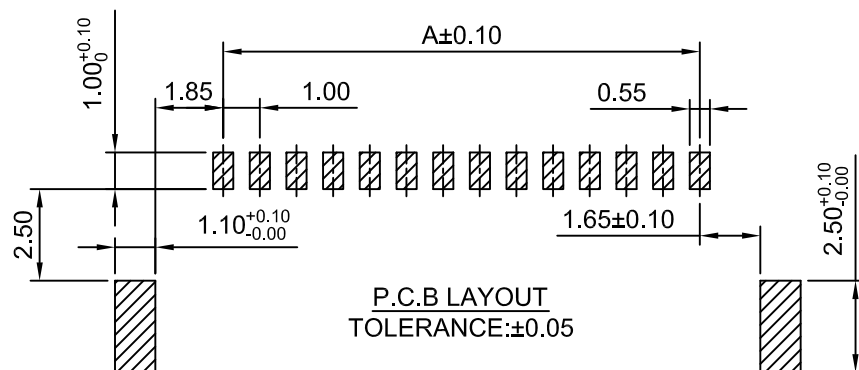
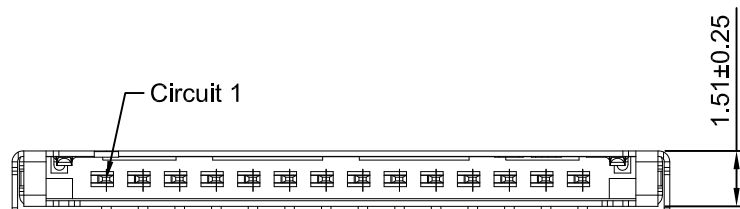
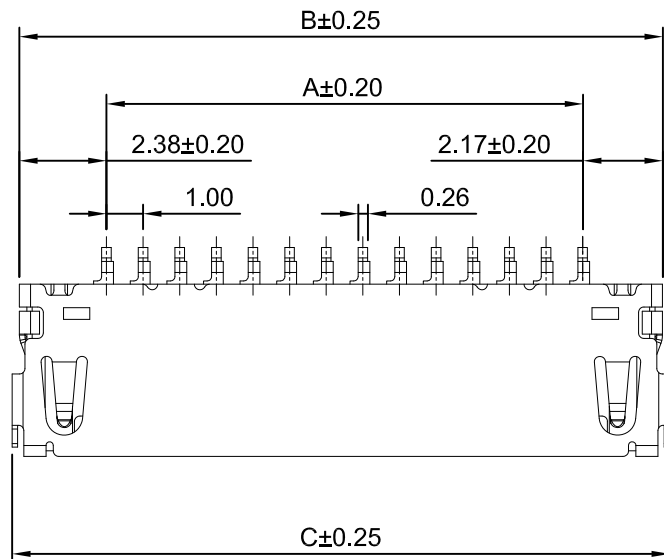


SPECIFICATIONS:

Current rating: 1A AC,DC
Voltage rating: 100V AC,DC
Temperature range: -40°C ~ +105°C
Contact resistance: 30MΩ Max.
Insulation resistance: 500MΩ Min.
Withstanding voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Gold over Nickel
Shell: Phosphor Bronze/Tin over Nickel
Material: Housing: LCP, UL94V-0 (Natural)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1004WR-S-14P-LCP	13.00	17.55	17.95
A1004WR-S-20P-LCP	19.00	23.55	23.95
A1004WR-S-30P-LCP	29.00	33.55	33.95

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1		
DRWN	CHK'D	APPR	1.00mm PITCH 90° WAFER - SMD TYPE	
Chengbiao Ye	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°				
		A1004WR-S-XP-LCP		A2