

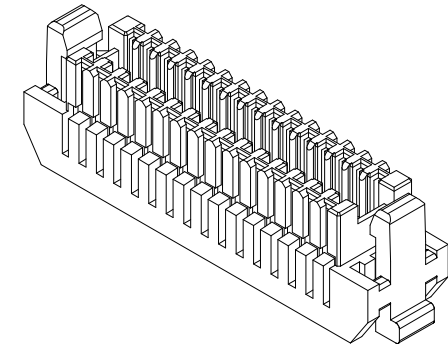



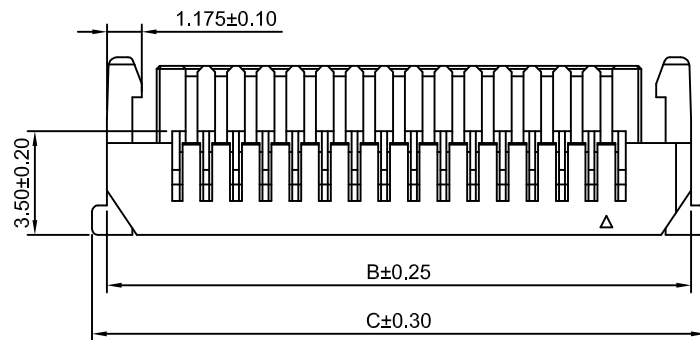

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66 UL94V-0(Natural)
Ordering Information & Dimensions

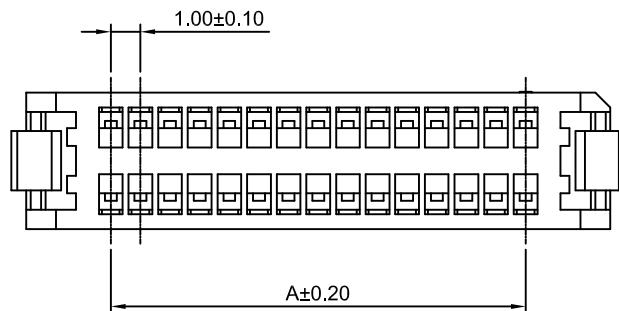

Part NO.	Dimensions(mm)		
	A	B	C
A1006H-2x3P	2.00	7.70	8.70
A1006H-2x5P	4.00	9.70	10.70
A1006H-2x6P	5.00	10.70	11.70
A1006H-2x7P	6.00	11.70	12.70
A1006H-2x8P	7.00	12.70	13.70
A1006H-2x9P	8.00	13.70	14.70
A1006H-2x10P	9.00	14.70	15.70
A1006H-2x12P	11.00	16.70	17.70
A1006H-2x15P	14.00	19.70	20.70
A1006H-2x20P	19.00	24.70	25.70
A1006H-2x25P	24.00	29.70	30.70

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	1.00mm PITCH DUAL ROW HOUSING
DRWN	CHK'D	APPR	
XU Lei	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
DRAWING NO.			REV A0
A1006H-2xXP-66			