
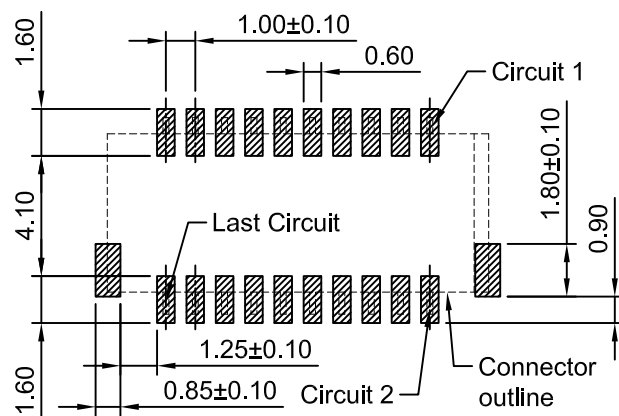
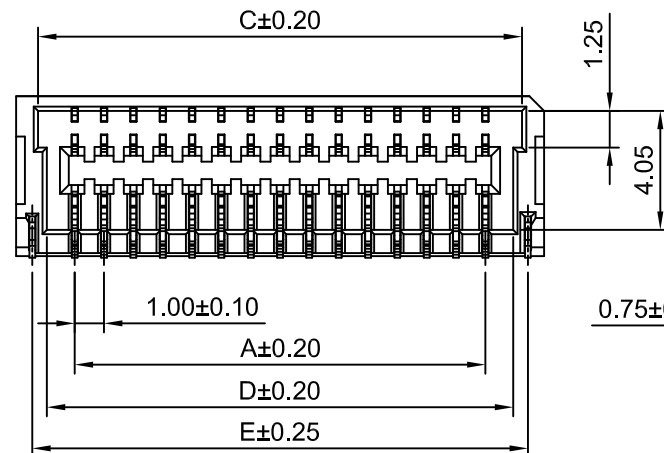


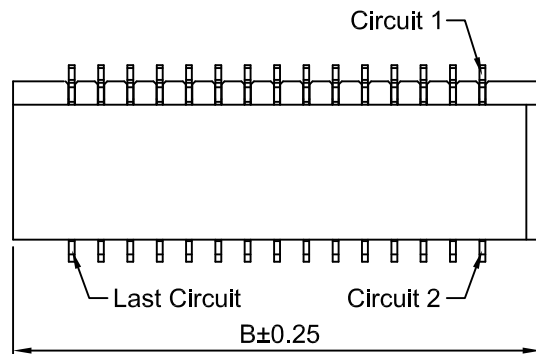

P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

Ordering Information:

A1006WR-S-2xXP - *** - ***
1 2 3

1.Part No.

2.Material:

(Blank) : Nylon 9T,UL94V-0

HF : Nylon 9T,UL94V-0, Halogen Free

3.Finish:

(Blank)Gold over Nickel (Au:1u")


G3:Gold over Nickel (Au:3u"Mating Area)

G15: Gold over Nickel (Au:15u",Mating Area)

G30: Gold over Nickel (Au:30u",Mating Area)

T:Bright Tin over Nickel

MT:Matte Tin over Nickel

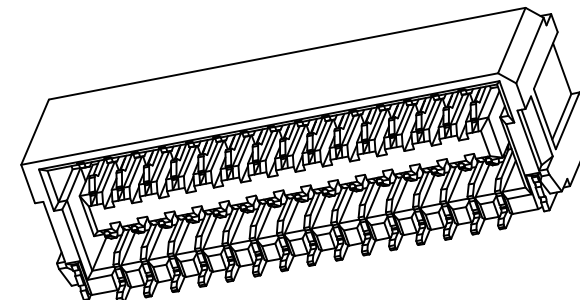

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze

Solder Tabs: Brass/Gold over Nickel

Material: Nylon 9T,UL94V-0(Ivory)

Ordering Information & Dimensions

Part No	Dimensions (mm)				
	A	B	C	D	E
A1006WR-S-2x5P	4.00	8.00	6.50	5.90	6.90
A1006WR-S-2x8P	7.00	11.00	9.50	8.90	9.90
A1006WR-S-2x10P	9.00	13.00	11.50	10.90	11.90
A1006WR-S-2x15P	14.00	18.00	16.50	15.90	16.90
A1006WR-S-2x20P	19.00	23.00	21.50	20.90	21.90
A1006WR-S-2x25P	24.00	28.00	26.50	25.90	26.90

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	1.00mm PITCH RIGHT-ANGLE DUAL ROW WAFER -SMD TYPE
DRWN	CHK'D	APPR	DRAWING NO.
Wenmin Luo	Diankui Wan	Jack Yin	A1006WR-S-2xXP
General Tolerances		THIRD ANGLE PROJECTION	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A0
A0	NEW RELEASE	2021.04.07	
REV	DESCRIPTION	DATE	