

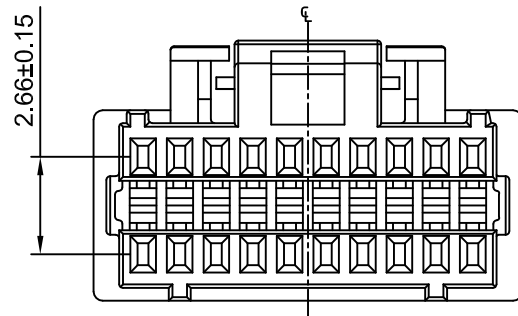
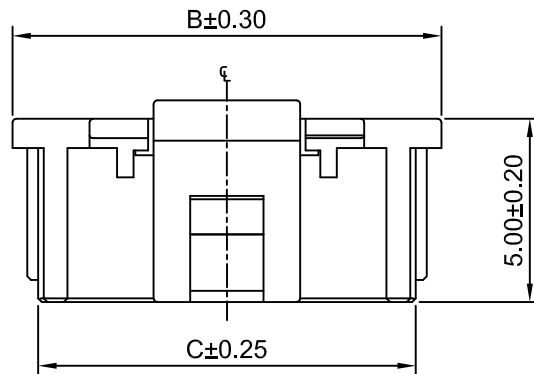
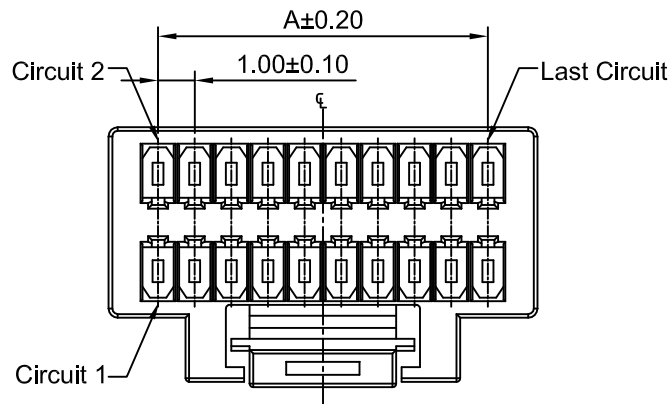
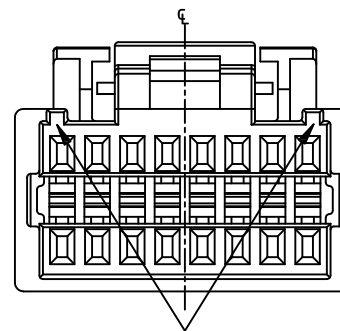


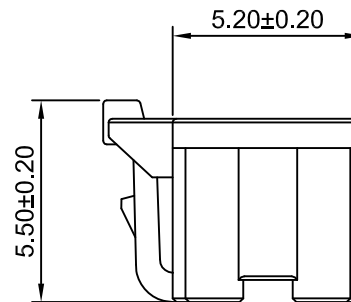

2x10P ~2x25P With Four Guide Rib



2x8P With Tow Guide Rib

Ordering Information:

A1008H-2xXP - $\frac{***}{1} - \frac{**}{2} - \frac{***}{3} - \frac{***}{4}$

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Halogen:

(Blank): Normal Material

HF: Halogen Free

4.Color:

(Blank): White

BK: Black

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1008H-2x8P	7.00	9.70	8.30
A1008H-2x10P	9.00	11.70	10.30
A1008H-2x12P	11.00	13.70	12.30
A1008H-2x14P	13.00	15.70	14.30
A1008H-2x15P	14.00	16.70	15.30
A1008H-2x18P	17.00	19.70	18.30
A1008H-2x20P	19.00	21.70	20.30
A1008H-2x25P	24.00	26.70	25.30

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1		
DRWN	CHK'D	APPR	1.00x2.66 mm PITCH DUAL ROW HOUSING	
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A3
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
			A1008H-2xXP	