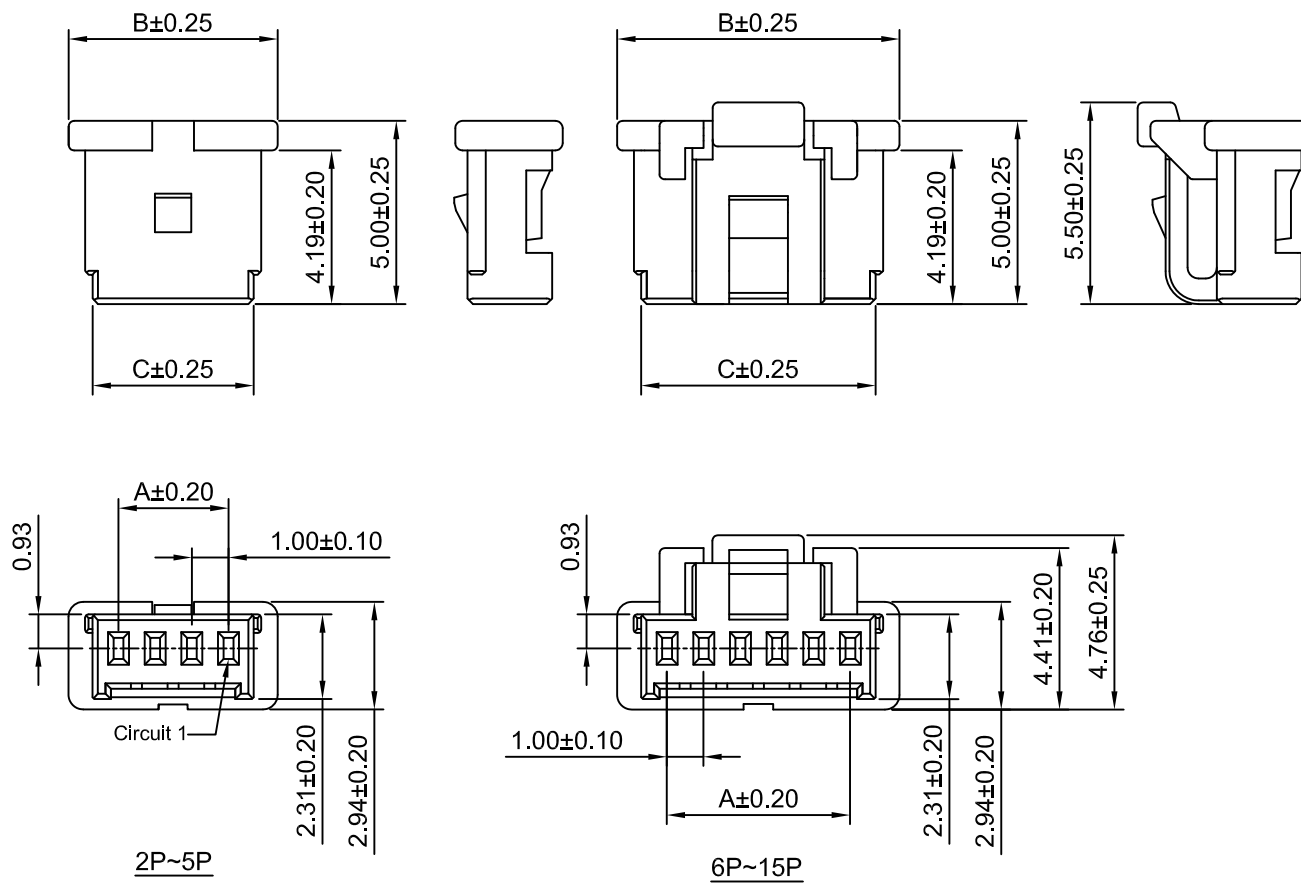


SPECIFICATIONS:

Current rating: 1A AC,DC
Voltage rating: 100V AC,DC
Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact resistance: 30mΩ Max.
Insulation resistance: 500MΩ Min.
Withstanding voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.00	3.70	2.40	9P	8.00	10.70	9.40
3P	2.00	4.70	3.40	10P	9.00	11.70	10.40
4P	3.00	5.70	4.40	11P	10.00	12.70	11.40
5P	4.00	6.70	5.40	12P	11.00	13.70	12.40
6P	5.00	7.70	6.40	13P	12.00	14.70	13.40
7P	6.00	8.70	7.40	14P	13.00	15.70	14.40
8P	7.00	9.70	8.40	15P	14.00	16.70	15.40

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	5:1	1 of 1	1.00mm Pitch		
DRAWN	CHK'D	APPR	Housing		
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x,x±0.25 x,xxx±0.20 x,xxx±0.15 ANGLES ±1°			A1008H-XP		A2

A2	CHANGE THE DRAWING	2023.05.15
A1	CHANGE THE DRAWING	2019.11.08
A0	NEW RELEASE	2012.01.16
REV	DESCRIPTION	DATE