

Ordering Information:

A1008WR-S-2xXP - *** - ***
1 2 3

1.Part NO.

2.Color:

(Blank): Natural

BK: Black


3.Pin Finish:

(Blank): Gold over Nickel



G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)


T: Tin over Nickel






2x8P

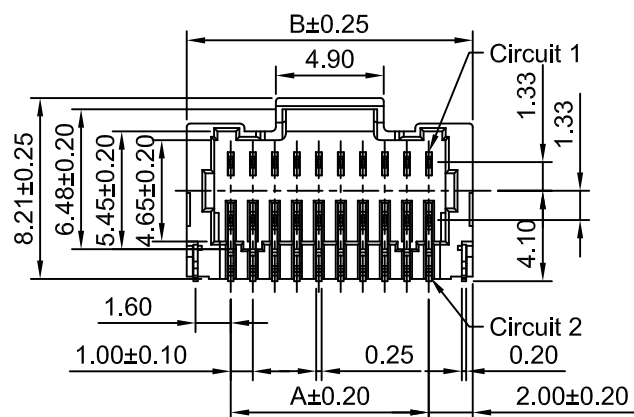

2x10P~2x25P

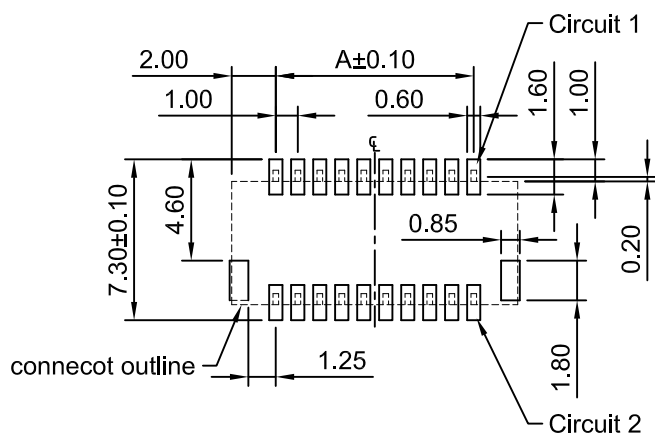

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

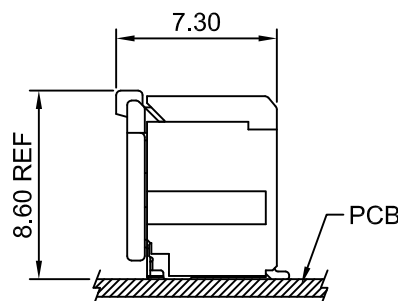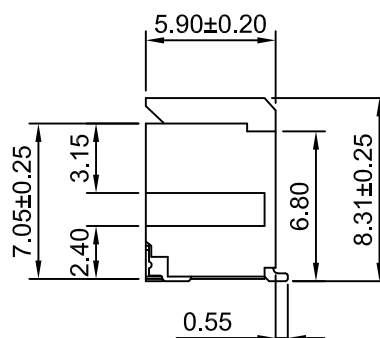

ASSEMBLY LAYOUT

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 250V AC/minute

Pin Material:Phosphor Bronze

Soder Tabs:Brass/Tin over Nickel

Material: Nylon 4T,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1008WR-S-2x8P	7.00	11.00
A1008WR-S-2x10P	9.00	13.00
A1008WR-S-2x12P	11.00	15.00
A1008WR-S-2x14P	13.00	17.00
A1008WR-S-2x15P	14.00	18.00
A1008WR-S-2x18P	17.00	21.00
A1008WR-S-2x20P	19.00	23.00
A1008WR-S-2x25P	24.00	28.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A6	CHANGE THE DRAWING	2023.03.20	Unit	Scale	Sheet	TITLE 1.00mm PITCH DUAL ROW WAFER - SMD TYPE					
A5	CHANGE THE DRAWING	2023.01.10	mm	3:1	1 of 1						
A4	CHANGE THE DRAWING	2022.08.01	DRAWN	CHK'D	APPR						
A3	CHANGE THE DRAWING	2022.08.01	Chengbiao Ye	Diankui Wan	Jack Yin						
A2	CHANGE THE DRAWING	2021.03.24	General Tolerances x,x±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°		THIRD ANGLE PROJECTION 	DRAWING NO. A1008WR-S-2xXP					
A1	CHANGE THE DRAWING	2021.02.05									
A0	NEW RELEASE	2005.07.01							REV A6		
REV	DESCRIPTION	DATE									

REV
A6