

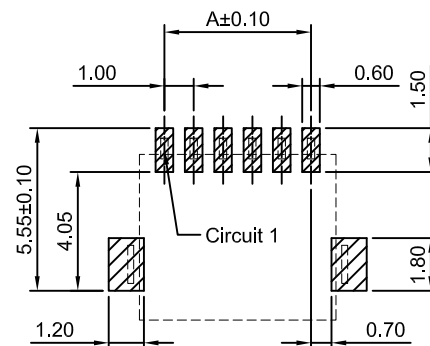
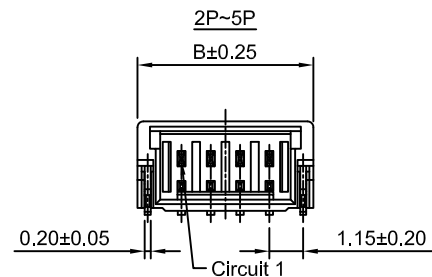
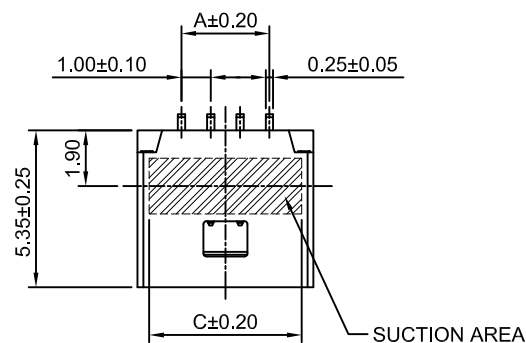
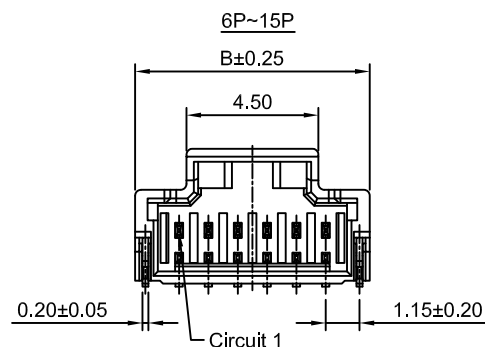
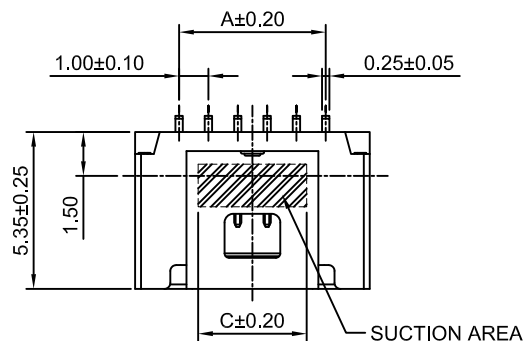
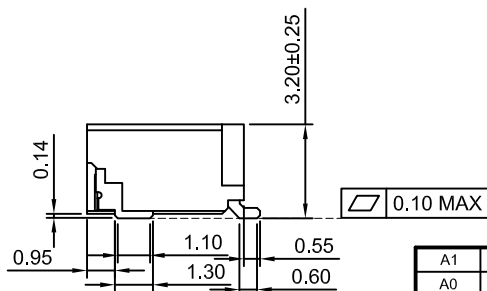




P.C.B LAYOUT
TOLERANCE:±0.05

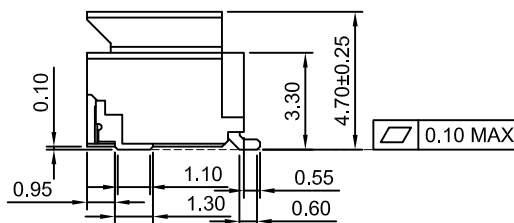

Ordering Information:

A1008WR-S-XP - ***

1 2

1.Part NO.

2.Material:

(Blank): Nylon 9T,UL94V-0(Beige)

LCP: LCP,UL94V-0(Beige)

2.Pin Finish:

(blank): Tin over Nickel

G: Gold over Nickel (Au:1u")

G3: Gold over Nickel (Au:3u")

G15: Gold over Nickel (Au:15u",Mating Area)

G30: Gold over Nickel (Au:30u",Mating Area)

SPECIFICATIONS:

Current rating: 1A AC,DC

Voltage rating: 100V AC,DC

Temperature range: -40°C ~ +105°C

Contact resistance: 20mΩ Max.

Insulation resistance: 500MΩ Min.

Withstanding voltage: 500V AC/minute

Pin Material: Phosphor Bronze

Solder Tabs: Phosphor Bronze/Tin over Nickel

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1008WR-S-2P	1.00	4.00	3.20
A1008WR-S-3P	2.00	5.00	4.20
A1008WR-S-4P	3.00	6.00	5.20
A1008WR-S-5P	4.00	7.00	6.20
A1008WR-S-6P	5.00	8.00	3.70
A1008WR-S-7P	6.00	9.00	4.70
A1008WR-S-8P	7.00	10.00	5.70
A1008WR-S-9P	8.00	11.00	6.70
A1008WR-S-10P	9.00	12.00	7.70
A1008WR-S-11P	10.00	13.00	8.70
A1008WR-S-12P	11.00	14.00	9.70
A1008WR-S-13P	12.00	15.00	10.70
A1008WR-S-14P	13.00	16.00	11.70
A1008WR-S-15P	14.00	17.00	12.70

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	1.00mm PITCH 90° SINGLE ROW WAFER -SMD TYPE	
DRWN	CHK'D	APPR	DRAWING NO.	
Dengchun Yi	Djankui Wan	Jack Yin	A1008WR-S-XP	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A1	

A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2012.01.16
REV	DESCRIPTION	DATE