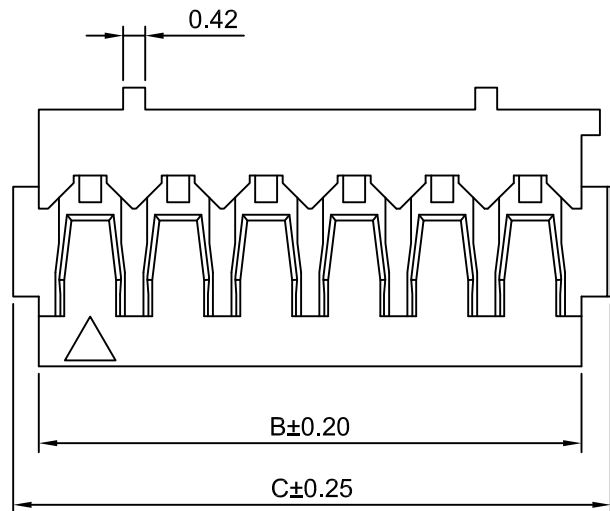
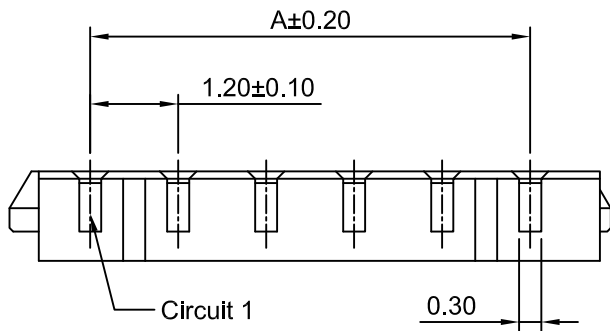


SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.


Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PBT , UL94V-0(gray)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1201HD-2P	1.20	2.60	3.40
A1201HD-3P	2.40	3.80	4.60
A1201HD-4P	3.60	5.00	5.80
A1201HD-5P	4.80	6.20	7.00
A1201HD-6P	6.00	7.40	8.20
A1201HD-7P	7.20	8.60	9.40
A1201HD-8P	8.40	9.80	10.60
A1201HD-9P	9.60	11.00	11.80
A1201HD-10P	10.80	12.20	13.00
A1201HD-11P	12.00	13.40	14.20
A1201HD-12P	13.20	14.60	15.40
A1201HD-13P	14.40	15.80	16.60
A1201HD-14P	15.60	17.00	17.80
A1201HD-15P	16.80	18.20	19.00

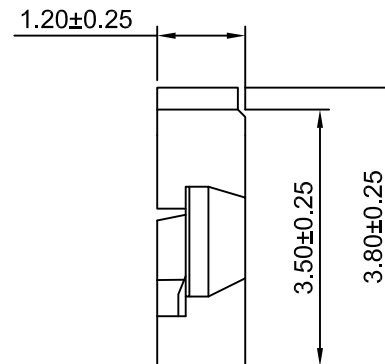

A2	MODIFY DRAWING	2021.11.16
A1	MODIFY DRAWING	2020.05.13
A0	NEW RELEASE	2013.10.25
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet
mm	10:1	1 of 1
DRWN	CHK'D	APPR
Dengchun Yi	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		
TITLE		
1.20mm PITCH HOUSING		
DRAWING NO.		REV
A1201HD-XP		A1