

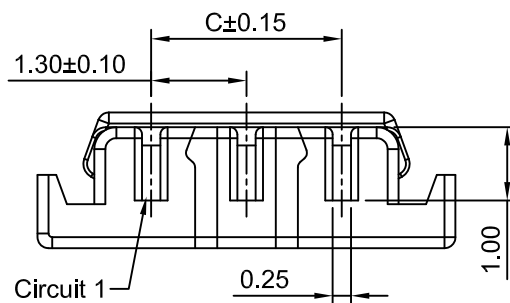
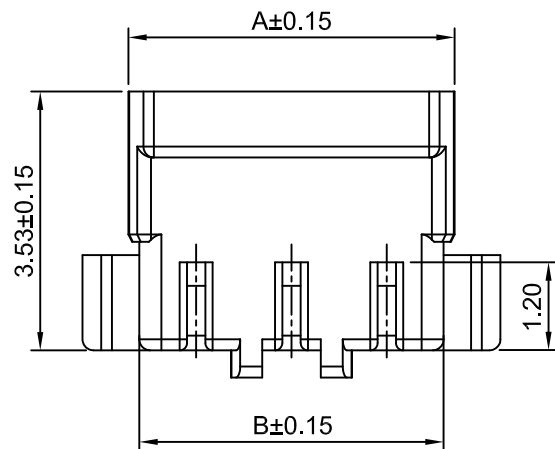



3~12P

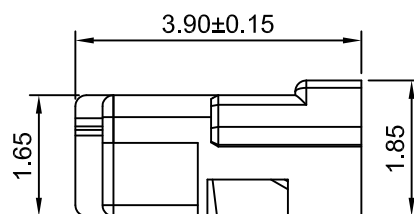

2P



Ordering Information:

A1201HG-XP - ***

1 2

1.Part NO.

2.Color:

(Blank): White

BK: Black

GY: Gray

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 30V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20MΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute

Material:Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.15	2.85	1.30	8P	10.95	10.65	9.10
3P	4.45	4.15	2.60	9P	12.25	11.95	10.40
4P	5.75	5.45	3.90	10P	13.55	13.25	11.70
5P	7.05	6.75	5.20	11P	14.85	14.55	13.00
6P	8.35	8.05	6.50	12P	16.15	15.85	14.30
7P	9.65	9.35	7.80				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 1.30mm PITCH Housing		
mm	10:1	1 of 1			
DRAWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1201HG-XP		REV A1
x,xx±0,25					
x,xxx±0,20					
x,xxxx±0,15					
ANGLES ±1°					

A1	CHANGE THE DRAWING	2023.03.16
A0	NEW RELEASE	2018.05.30
REV	DESCRIPTION	DATE