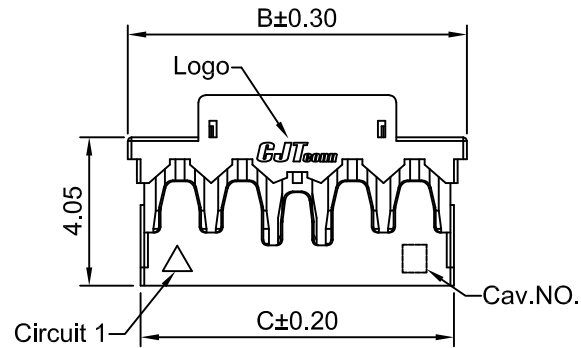
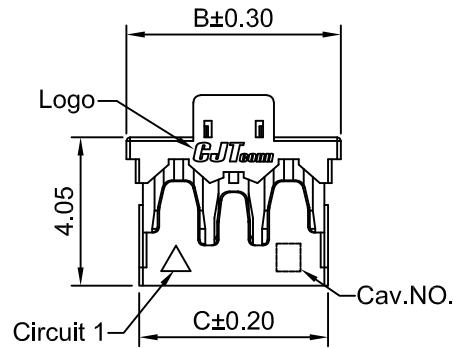
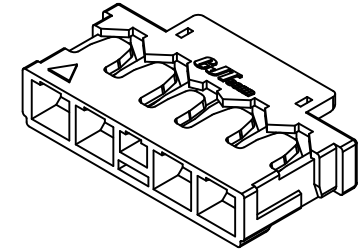
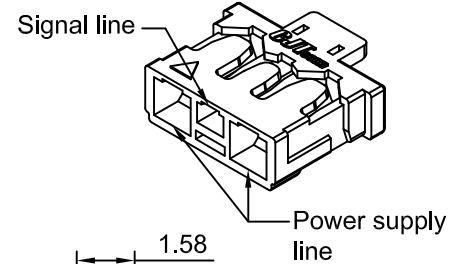
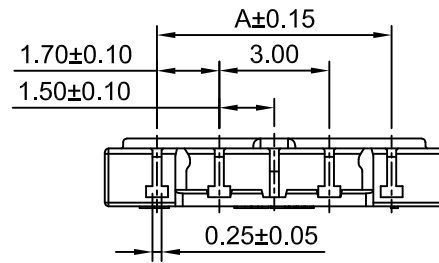





- 3P
Power supply line: Pin1, Pin3 (Just for A1201-T-J Crimp Terminal)
Signal line: Pin2 (Just for A1201-T-A Crimp Terminal)
- 5P
Power supply line: Pin1, Pin2, Pin4, Pin5 (Just for A1201-T-J Crimp Terminal)
Signal line: Pin3 (Just for A1201-T-A Crimp Terminal)
- 7P
Power supply line: Pin1, Pin2, Pin3, Pin5, Pin6, Pin7 (Just for A1201-T-J Crimp Terminal)
Signal line: Pin4 (Just for A1201-T-A Crimp Terminal)

SPECIFICATIONS:

Power supply line: 5A AC/DC (AWG#22)
Signal line: 1A AC/DC
Voltage Rating: 30V AC, DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 200V AC/minute
Material: PBT, UL94V-0 (Gray)

Ordering Information & Dimensions

Part NO.	Dimensions (mm)				
	A	B	C	D	E
A1201HJ-3P	3.00	5.85	5.15	5.35	2.20
A1201HJ-5P	6.40	9.25	8.55	8.75	5.40
A1201HJ-7P	9.80	12.65	11.95	12.15	8.80

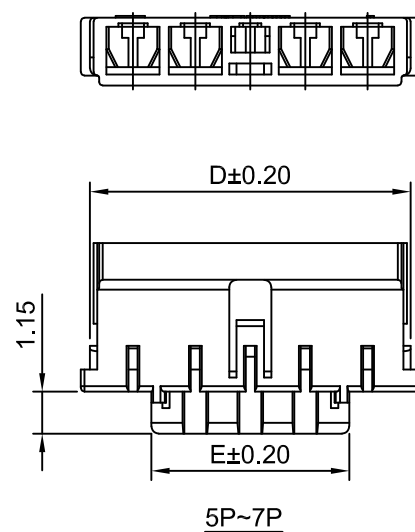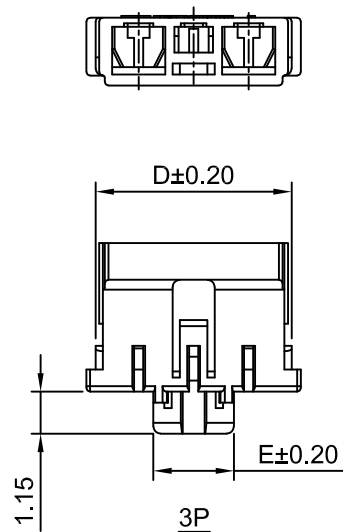

CJTconn CHANGJIANG CONNECTORS CO., LTD.			
Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	1.50mm PITCH HOUSING
DRAWN	CHK'D	APPR'D	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
A1	JL-GC-ECN00510	2025.01.13	
A0	NEW RELEASE	2024.07.14	
REV	DESCRIPTION	DATE	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
DRAWING NO.			REV
A1201HJ-XP			A1