
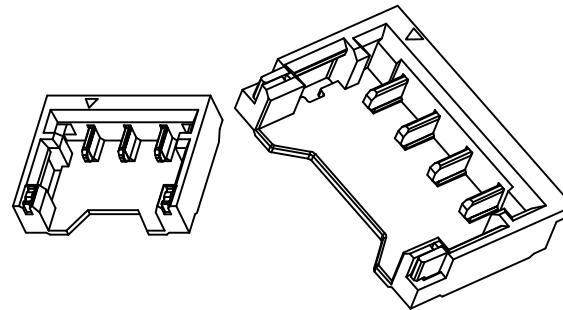
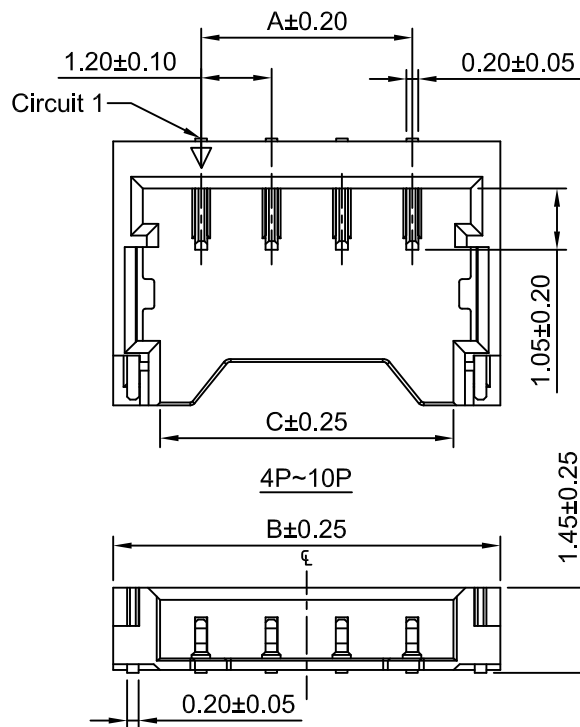



2P~3P

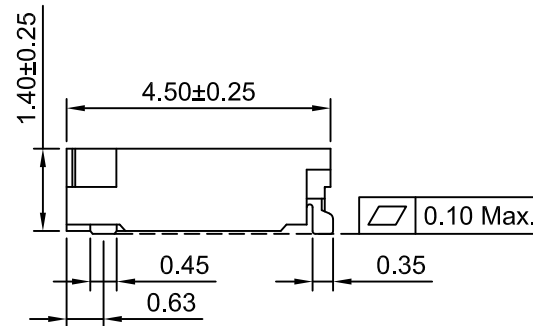


SPECIFICATIONS:


Current Rating: 2A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10MΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Gold over Nickel
Solder Tab: Phosphor Bronze/Tin over Nickel
Material: Nylon 46 ,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1201WR-S-2P	1.20	4.20	2.64
A1201WR-S-3P	2.40	5.40	3.84
A1201WR-S-4P	3.60	6.60	5.04
A1201WR-S-5P	4.80	7.80	6.24
A1201WR-S-6P	6.00	9.00	7.44
A1201WR-S-7P	7.20	10.20	8.64
A1201WR-S-8P	8.40	11.40	9.84
A1201WR-S-9P	9.60	12.60	11.04
A1201WR-S-10P	10.80	13.80	12.24

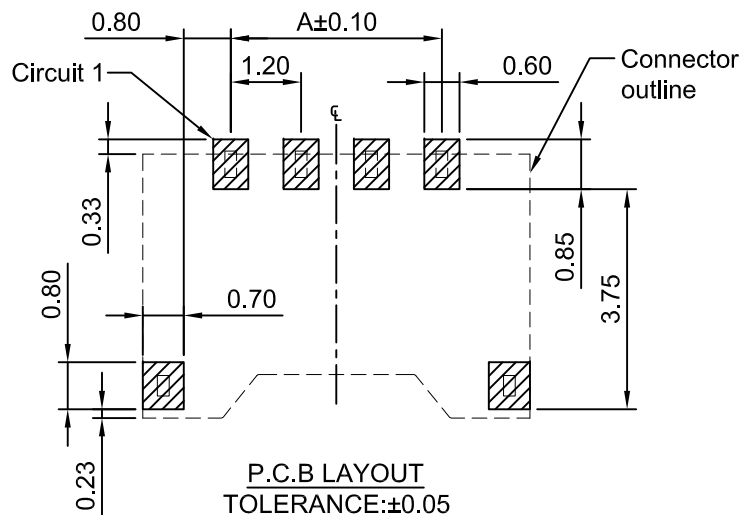

P.C.B LAYOUT
TOLERANCE:±0.05



A1	CHANGE THE DRAWING	2021.08.23
A0	NEW RELEASE	2011.05.22
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 1.20mm PITCH Right-Angle WAFER - SMD TYPE	
mm	8:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Dlankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1201WR-S-XP-46	
x.x±0.25				
x.xx±0.20				
x.xxx±0.15			REV	
ANGLES ±1°			A0	