

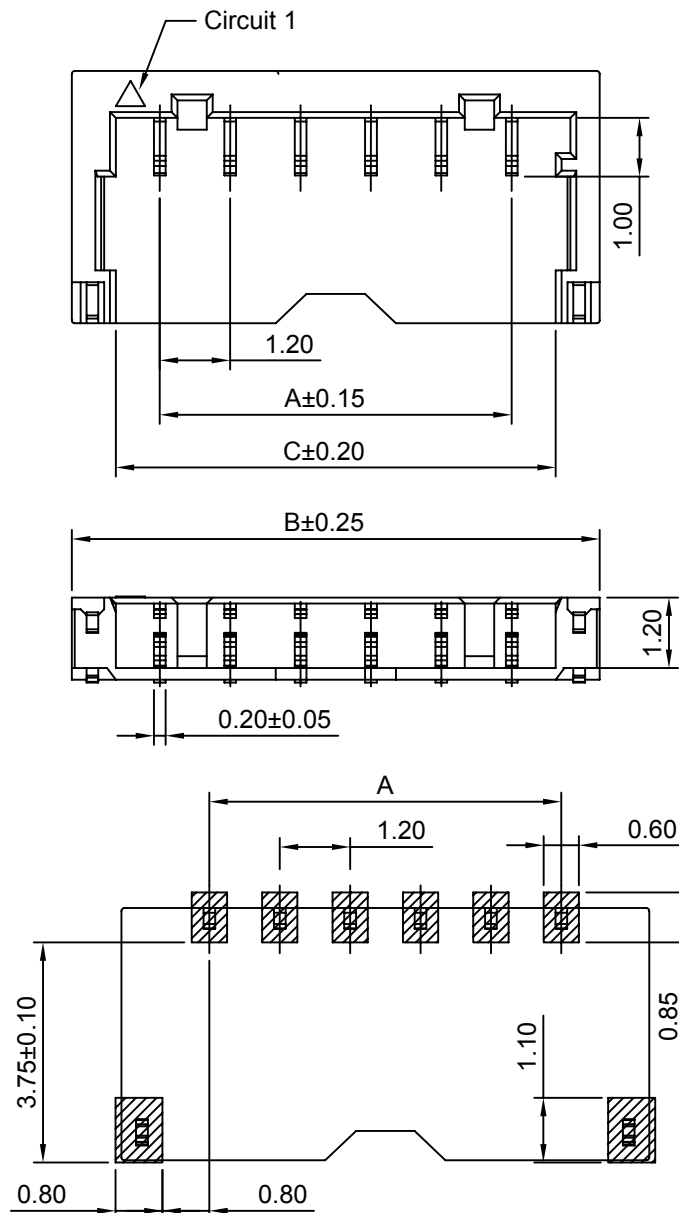


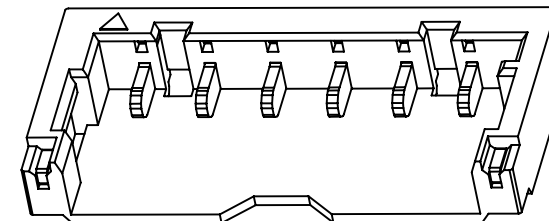

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05



SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $\leq 10\text{m}\Omega$ Max
Insulation Resistance: $100\text{M}\Omega$ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: Nylon9T,UL 94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.20	4.20	2.70	6P	6.00	9.00	7.50
3P	2.40	5.40	3.90	7P	7.20	10.20	8.70
4P	3.60	6.60	5.10	8P	8.40	11.40	9.90
5P	4.80	7.80	6.30				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	8:1	1 of 1
Draw BY:	Approved :	
Moore	GONGYB	

Title :
1.20mm PITCH
90° Wafer - SMT TYPE

General Tolerance			ANGLE±	DRAW NO : A1201WRD-S-XP	REV A0
A0	NEW RELEASE	2014.08.11			
REV	DESCRIPTION	DATE			