

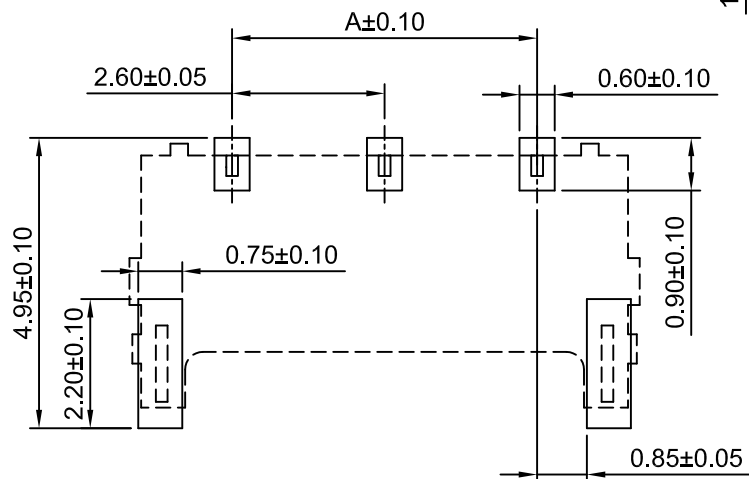
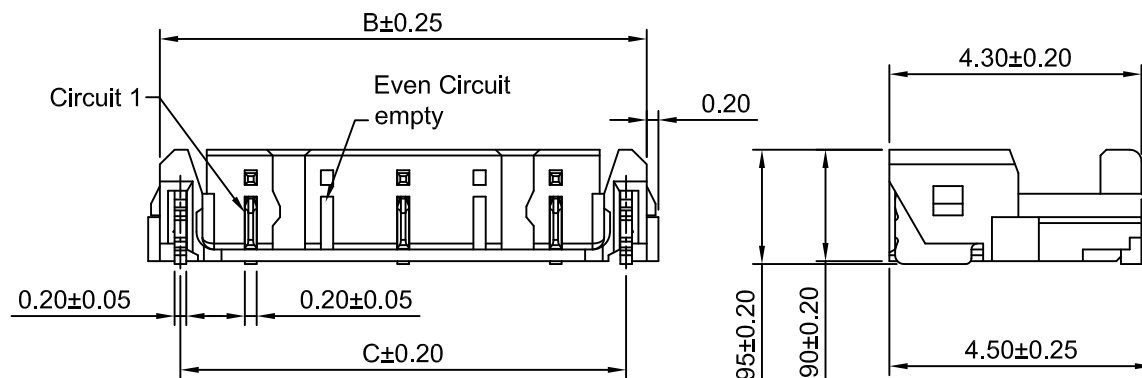


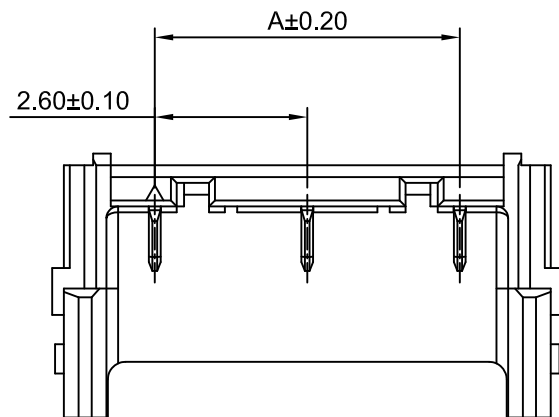

P.C.B LAYOUT



Ordering Information:

A1201WRG-S-XP-A - *** - ***
1 2 3

1.Part No.

2.Material:

(blank) - Nylon 4T ,UL94V-0

HF - Nylon 4T ,UL94V-0,Halogen Free

3.Color:

(blank) - White

BK - Black

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 30V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20MΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute

Pin Material: High conductivity copper/Gold over Nickel

Material: Nylon 4T ,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
3P	2.60	5.70	5.00	9P	10.40	13.50	12.80
5P	5.20	8.30	7.60	11P	13.00	16.10	15.40
7P	7.80	10.90	10.20				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	8:1	1 of 1

Title :

1.30mm Pitch

Draw BY:	Approved :
Diankui Wan	Jack Yin

90° Wafer - SMT Type

General Tolerance

x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

DRAW NO : A1201WRG-S-XP-A

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2018.05.30