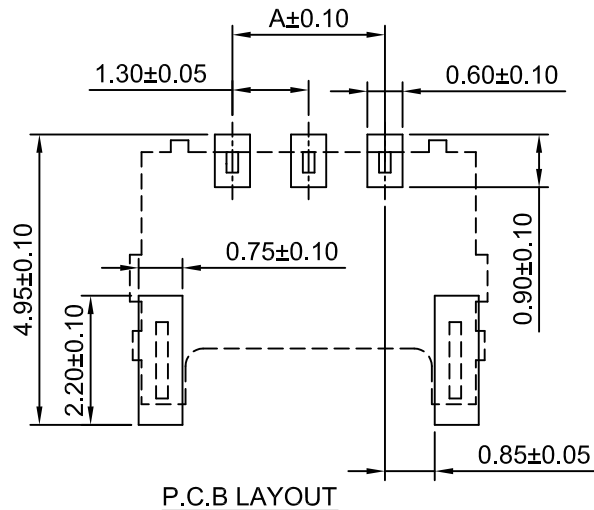
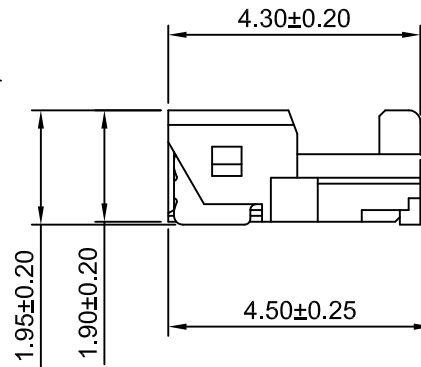
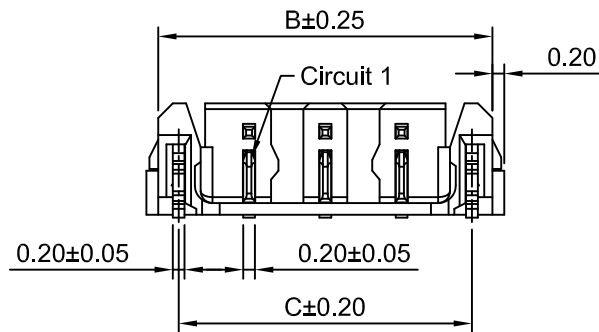

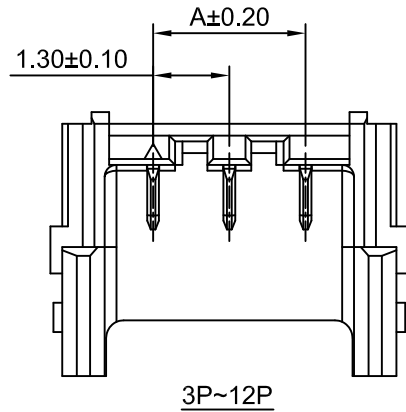


Ordering Information:
A1201WRG-S-XP - *** - ***
1 2 3

- 1.Part NO.
2.Material:
(Blank): Nylon 4T ,UL94V-0
HF: Nylon 4T ,UL94V-0,Halogen Free
3.Color:
(Blank): Beige
BK: Black

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 30V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20MΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: High conductivity copper/Gold over Nickel
Material: Nylon 4T ,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.30	4.40	3.70	8P	9.10	12.20	11.50
3P	2.60	5.70	5.00	9P	10.40	13.50	12.80
4P	3.90	7.00	6.30	10P	11.70	14.80	14.10
5P	5.20	8.30	7.60	11P	13.00	16.10	15.40
6P	6.50	9.60	8.90	12P	14.30	17.40	16.70
7P	7.80	10.90	10.20				

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 1.30mm PITCH RIGHT-ANGLE WAFER - SMD TYPE		
mm	8:1	1 of 1			
DRAWN	CHK'D	APPR			
Chengbiao Ye	Diankui Wan	Jack Yin	DRAWING NO. A1201WRG-S-XP		
General Tolerances					
THIRD ANGLE PROJECTION					
x,x±0,25 x,xx±0,20 x,xxx±0,15 ANGLES ±1°			REV A1		
					