
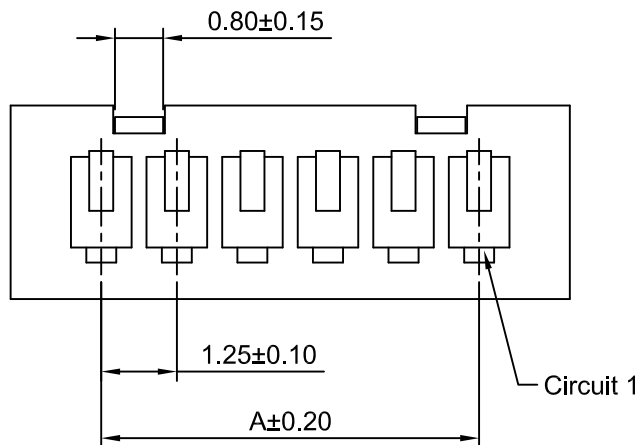
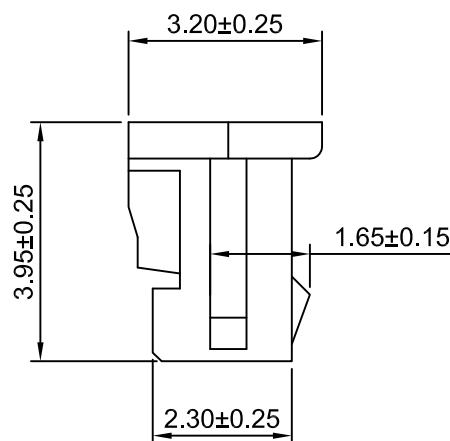


SPECIFICATIONS:

Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0,Halogen Free(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1251H-2P	1.25	4.25	2.95
A1251H-3P	2.50	5.50	4.20
A1251H-4P	3.75	6.75	5.45
A1251H-5P	5.00	8.00	6.70
A1251H-6P	6.25	9.25	7.95
A1251H-7P	7.50	10.50	9.20
A1251H-8P	8.75	11.75	10.45
A1251H-9P	10.00	13.00	11.70
A1251H-10P	11.25	14.25	12.95
A1251H-11P	12.50	15.50	14.20
A1251H-12P	13.75	16.75	15.45
A1251H-13P	15.00	18.00	16.70
A1251H-14P	16.25	19.25	17.95
A1251H-15P	17.50	20.50	19.20
A1251H-16P	18.75	21.75	20.45
A1251H-17P	20.00	23.00	21.70
A1251H-18P	21.25	24.25	22.95
A1251H-19P	22.50	25.50	24.20
A1251H-20P	23.75	26.75	25.45

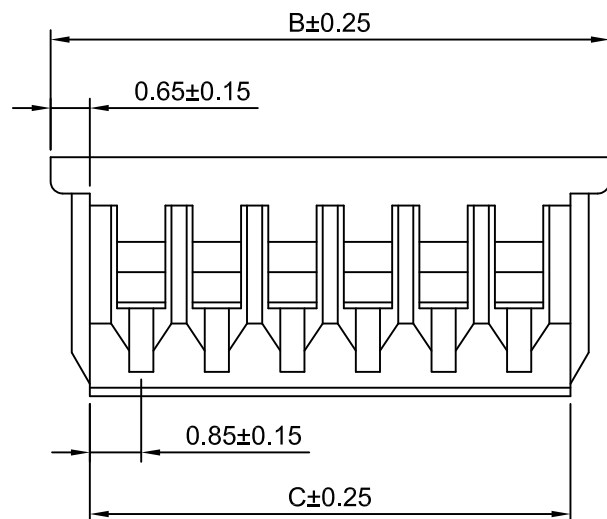

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	8:1	1 of 1	1.25mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			THIRD ANGLE PROJECTION	
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			A1251H-XP	
A3	CHANGE THE DRAWING	2021.03.05	REV	
A2	ADD THE SIZE	2020.12.12	A3	
A1	ADD THE INFORMATION	2020.04.02		
A0	NEW RELEASE	2005.05.10		
REV	DESCRIPTION	DATE		