

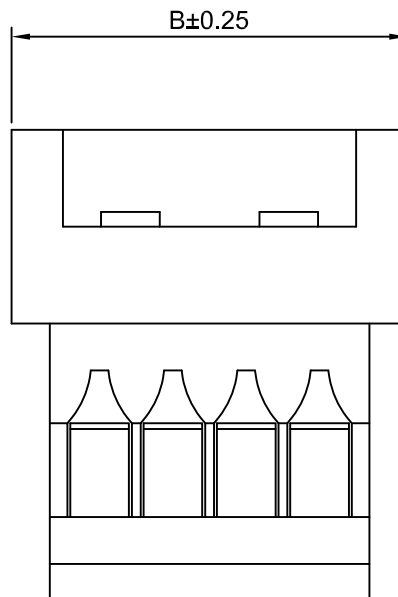
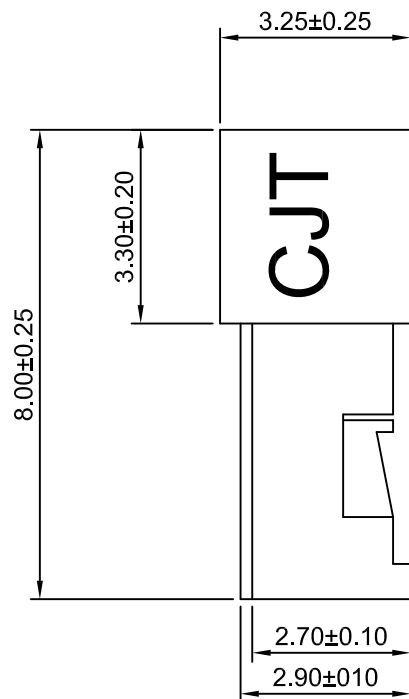


2P~3P

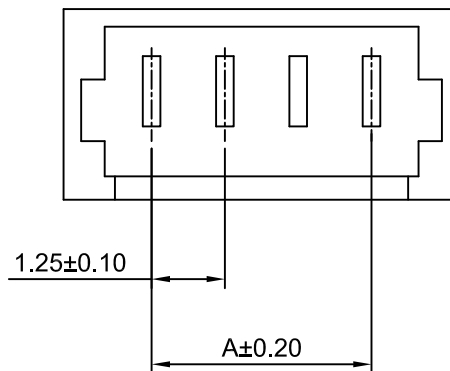

4P~20P



SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	4.25	12P	13.75	16.75
3P	2.50	5.50	13P	15.00	18.00
4P	3.75	6.75	14P	16.25	19.25
5P	5.00	8.00	15P	17.50	20.50
6P	6.25	9.25	16P	18.75	21.75
7P	7.50	10.50	17P	20.00	23.00
8P	8.75	11.75	18P	21.25	24.25
9P	10.00	13.00	19P	22.50	25.50
10P	11.25	14.25	20P	23.75	26.75
11P	12.50	15.50			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		8:1		1 of 1			
DRAWN		CHK'D		APPR		1.25mm PITCH HOUSING	
Zhen Shi		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°						A1251HM-XP	
						REV A1	