
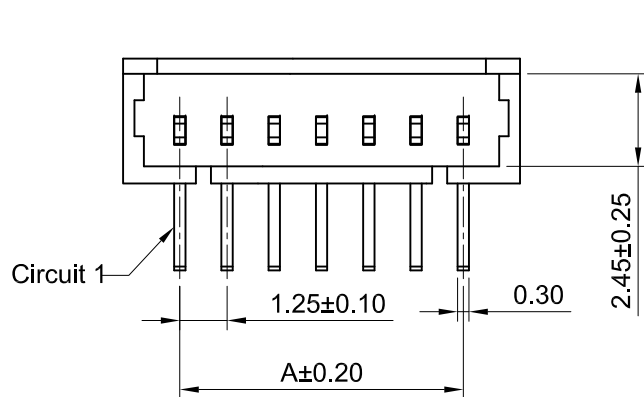


P.C.B LAYOUT






SPECIFICATIONS:


Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: LCP,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	4.30	12P	13.75	16.80
3P	2.50	5.55	13P	15.00	18.05
4P	3.75	6.80	14P	16.25	19.30
5P	5.00	8.05	15P	17.50	20.55
6P	6.25	9.30	16P	18.75	21.80
7P	7.50	10.55	17P	20.00	23.05
8P	8.75	11.80	18P	21.25	24.30
9P	10.00	13.05	19P	22.50	25.55
10P	11.25	14.30	20P	23.75	26.80
11P	12.50	15.55			

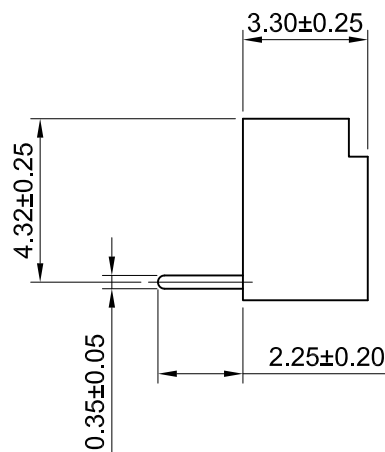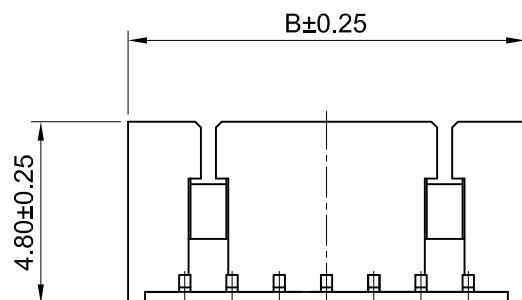

2P



3P

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 1.25mm Pitch	
mm		5:1		1 of 1			
Draw By:		Approved :		90° Wafer			
Diankui Wan		Jack Yin					
General Tolerance		PROJECT		DRAW NO : A1251WR-XP-LCP			
x.x±0.25 x.xx±0.20 x.xxx±0.15							
				REV A2			

A2	CHANGE THE DRAW NO.	2018.12.06
A1	Modify drawings	2016.03.20
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE