



5P~9P

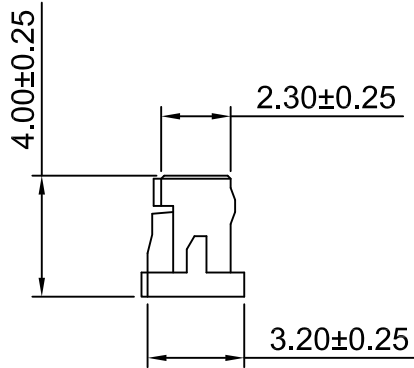


SPECIFICATIONS:


Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0(Gray)
 Pantone Color: 7529C~7530C

Ordering Information & Dimensions


Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	4.15	9P	10.00	12.90
3P	2.50	5.40	10P	11.25	14.15
4P	3.75	6.65	11P	12.50	15.40
5P	5.00	7.90	12P	13.75	16.65
6P	6.25	9.15	13P	15.00	17.90
7P	7.50	10.40	14P	16.25	19.15
8P	8.75	11.65	15P	17.50	20.40




2P~3P



4P



10P~14P



15P

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit mm	Scale 4:1	Sheet 1 of 1	Title : 1.25mm Pitch Housing	
Draw By: Diankui Wan		Approved : Jack Yin		
General Tolerance				
A1	ADD THE DRAWING	2019.11.01	PROJECT 	DRAW NO : A1252H-XP
A0	NEW RELEASE	2005.05.10		
REV	DESCRIPTION	DATE		
			REV A1	