
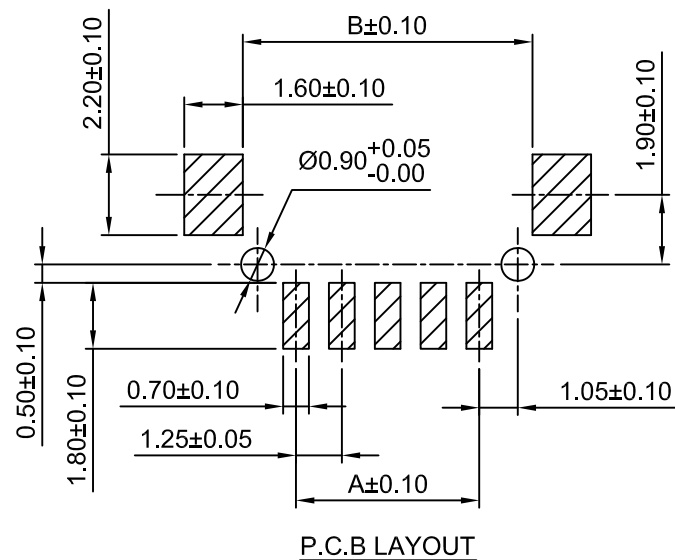
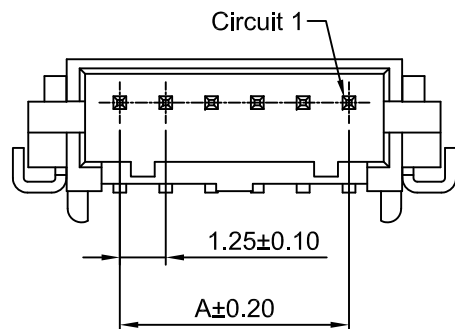
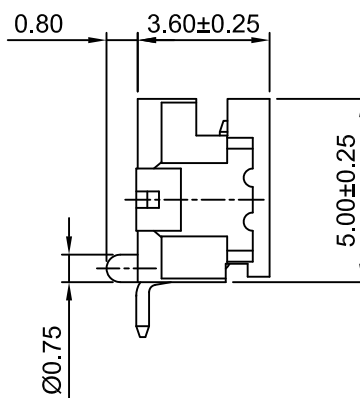


SPECIFICATIONS:

Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold over Nickel
 Solder Tabs: Phosphor Bronze/Gold over Nickel
 Material: Nylon 6T, UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	4.15	6.25	9P	10.00	12.90	15.00
3P	2.50	5.40	7.50	10P	11.25	14.15	16.25
4P	3.75	6.65	8.75	11P	12.50	15.40	17.50
5P	5.00	7.90	10.00	12P	13.75	16.65	18.75
6P	6.25	9.15	11.25	13P	15.00	17.90	20.00
7P	7.50	10.40	12.50	14P	16.25	19.15	21.25
8P	8.75	11.65	13.75	15P	17.50	20.40	22.50

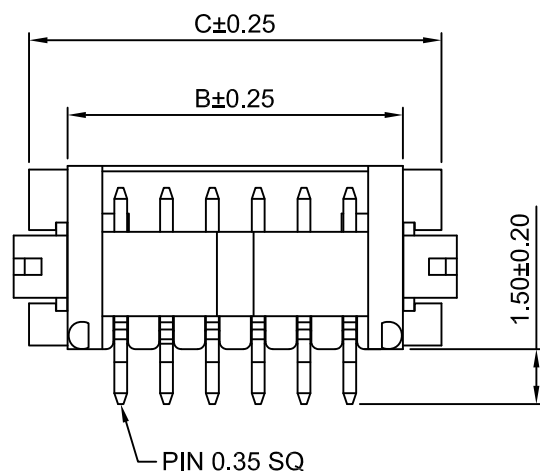

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 1.25mm PITCH RIGHT-ANGLE WAFER - SMD TYPE		
mm	5:1	1 of 1			
DRAWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x,xx±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°			A1252WR-S-F-XP-G		A1
A1 CHANGE THE DRAWING					
A0 NEW RELEASE					
REV DESCRIPTION		DATE			

A1	CHANGE THE DRAWING	2022.12.21
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE