


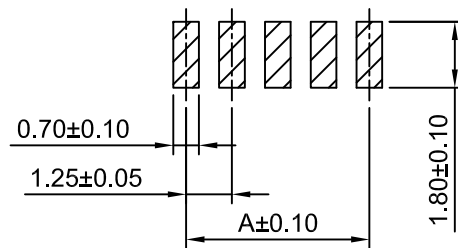
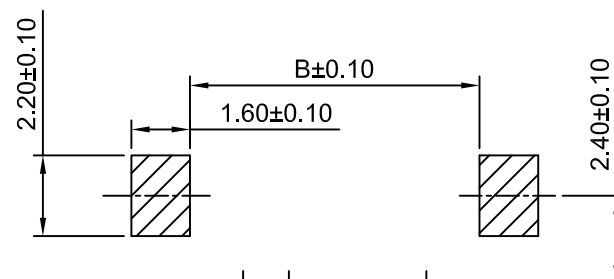



4P~15P

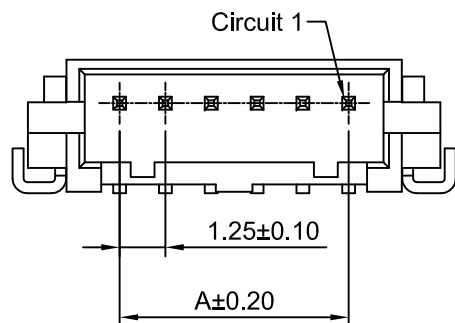


2P~3P

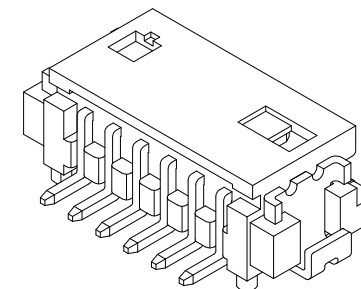

P.C.B LAYOUT

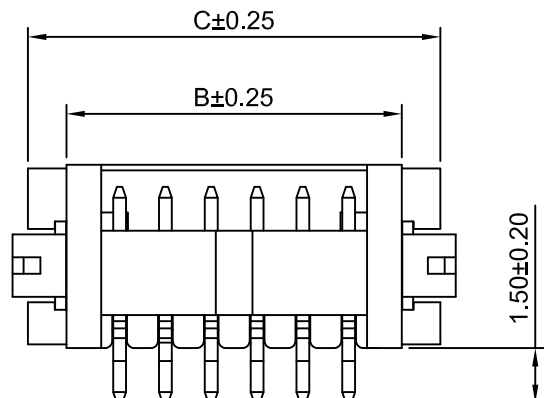

PIN 0.35 SQ



SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold over Nickel
Solder Tabs:Phosphor Bronze/Gold over Nickel
Material: Nylon 6T,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	4.15	6.25	9P	10.00	12.90	15.00
3P	2.50	5.40	7.50	10P	11.25	14.15	16.25
4P	3.75	6.65	8.75	11P	12.50	15.40	17.50
5P	5.00	7.90	10.00	12P	13.75	16.65	18.75
6P	6.25	9.15	11.25	13P	15.00	17.90	20.00
7P	7.50	10.40	12.50	14P	16.25	19.15	21.25
8P	8.75	11.65	13.75	15P	17.50	20.40	22.50

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 1.25mm PITCH RIGHT-ANGLE WAFER - SMD TYPE
mm	5:1	1 of 1	
DRAWN	CHK'D	APPR	
Chengbiao Ye	Diankui Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
A1 CHANGE THE DRAWING 2023.03.17 A0 NEW RELEASE 2009.05.10 REV DESCRIPTION DATE			DRAWING NO. A1252WR-S-XP-G
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A1