

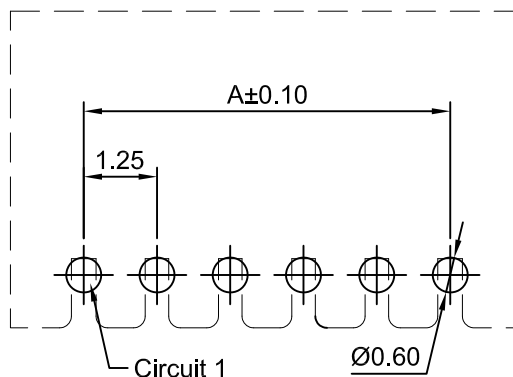
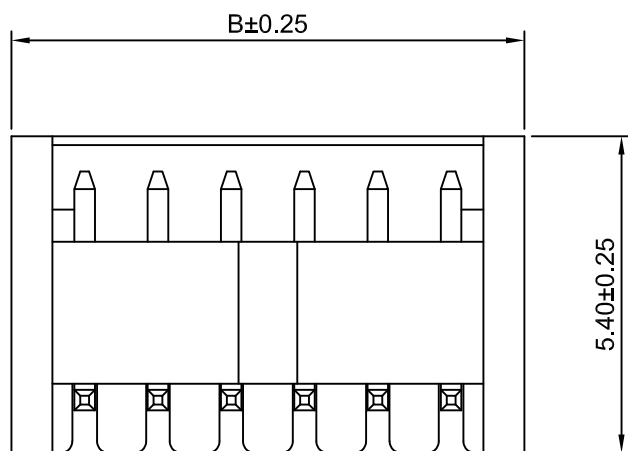
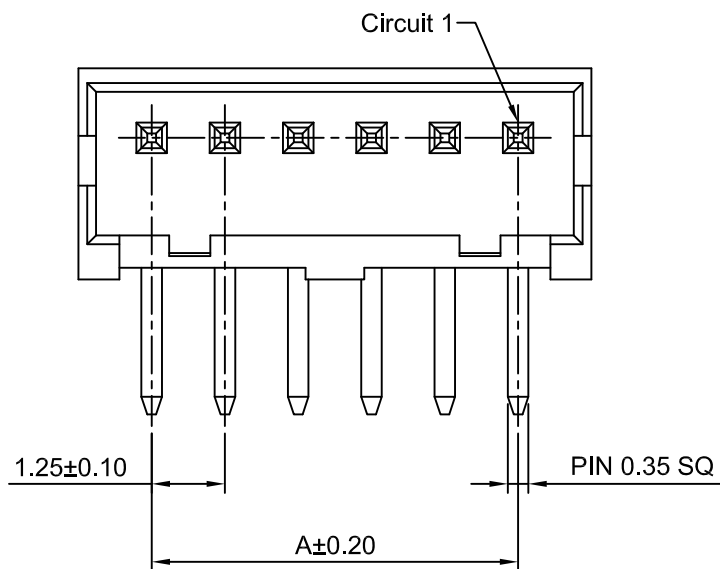


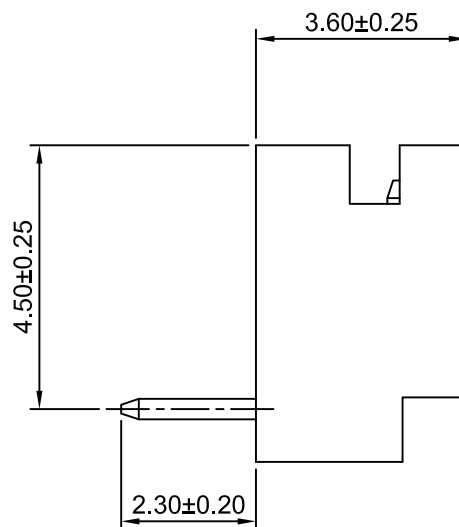

P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:

A1252WR-XP - ***
1 2

1.Part NO.

2.Finish:

(blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0(Gray)

Pantone Color: 7529C~7530C

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1252WR-2P	1.25	3.75
A1252WR-3P	2.50	5.00
A1252WR-4P	3.75	6.25
A1252WR-5P	5.00	7.50
A1252WR-6P	6.25	8.75
A1252WR-7P	7.50	10.00
A1252WR-8P	8.75	11.25
A1252WR-9P	10.00	12.50
A1252WR-10P	11.25	13.75
A1252WR-11P	12.50	15.00
A1252WR-12P	13.75	16.25
A1252WR-13P	15.00	17.50
A1252WR-14P	16.25	18.75
A1252WR-15P	17.50	20.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	8:1	1 of 1		
DRWN	CHK'D	APPR	1.25mm PITCH 90° DIP WAFER	
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
A1	CHANGE THE DRAWING	2019.03.11		
A0	NEW RELEASE	2005.05.10	A1252WR-XP	A1
REV	DESCRIPTION	DATE		