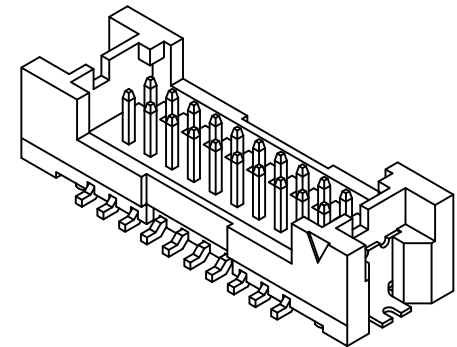
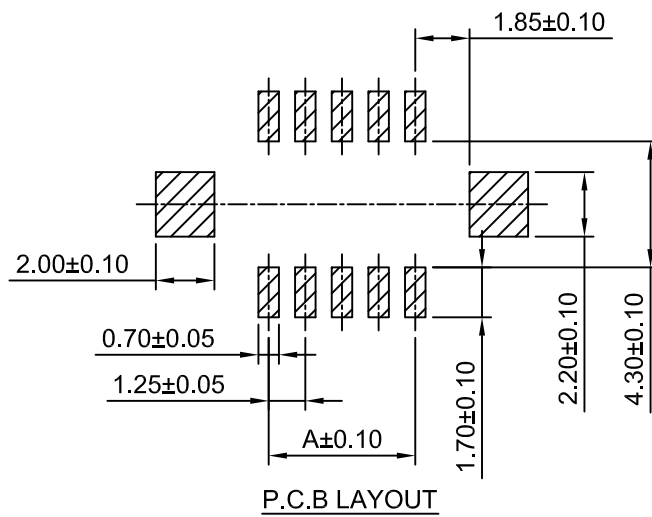
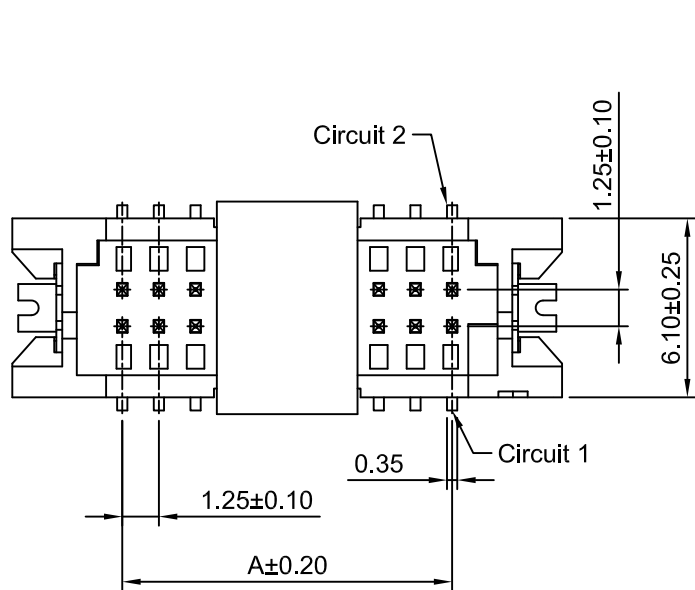


SPECIFICATIONS:

Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold over Nickel
 Solder Tabs: Brass/Gold over Nickel
 Material: Nylon 6T, UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	5.00	12.50	2x15P	17.50	25.00
2x7P	7.50	15.00	2x20P	23.75	31.25
2x10P	11.25	18.75			

CJT

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 1.25mm PITCH VERTICAL DUAL ROW -SMD TYPE			
mm		4:1		1 of 1					
DRWN Chengbiao Ye		CHK'D Diankul Wan		APPR Jack Yin					
General Tolerances				THIRD ANGLE PROJECTION 		DRAWING NO.		REV	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°						A1252WV-S-2xXP		A1	