
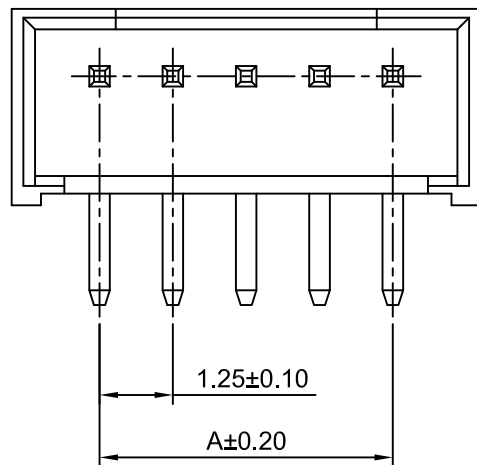
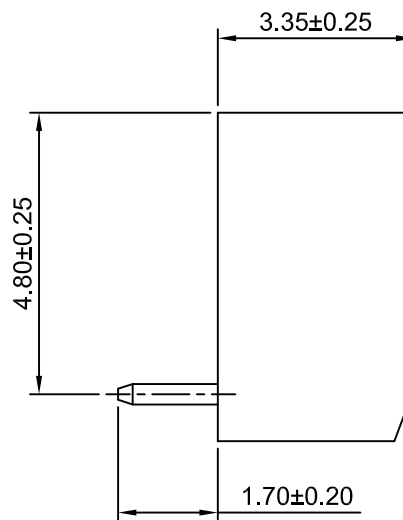
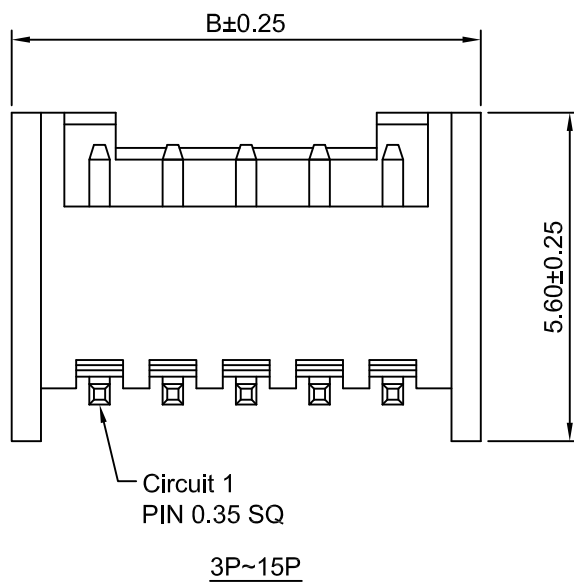



2P

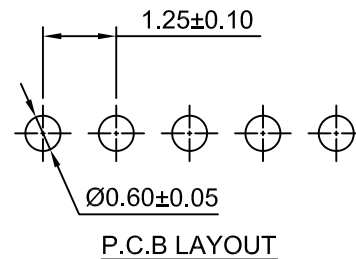

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Reddish brown)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	4.25	9P	10.00	13.00
3P	2.50	5.50	10P	11.25	14.25
4P	3.75	6.75	11P	12.50	15.50
5P	5.00	8.00	12P	13.75	16.75
6P	6.25	9.25	13P	15.00	18.00
7P	7.50	10.50	14P	16.25	19.25
8P	8.75	11.75	15P	17.50	20.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 1.25mm PITCH RIGHT-ANGLE WAFER	
mm		8:1		1 of 1			
DRAWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A1253WR-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
REV		DESCRIPTION		DATE		REV	
A1		CHANGE THE DRAWING 2023.03.16				A1	
A0		NEW RELEASE 2005.05.10					