

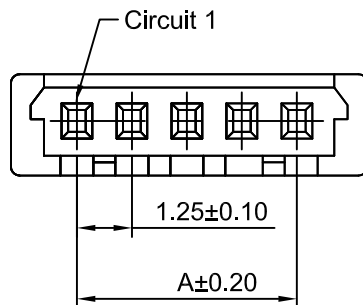

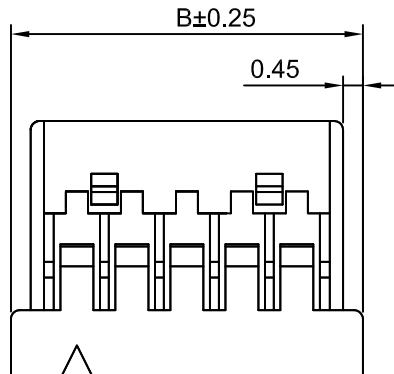


2P

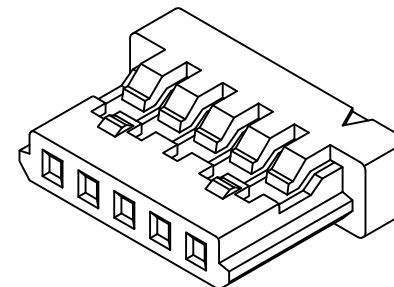

3P~30P

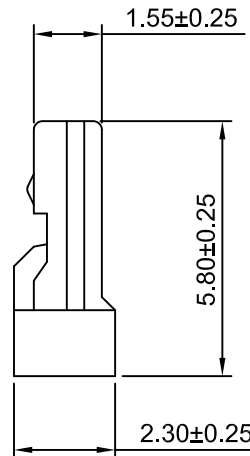

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0 (Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	4.35	11P	12.50	15.60
3P	2.50	5.60	12P	13.75	16.85
4P	3.75	6.85	13P	15.00	18.10
5P	5.00	8.10	14P	16.25	19.35
6P	6.25	9.35	15P	17.50	20.60
7P	7.50	10.60	20P	23.75	26.85
8P	8.75	11.85	25P	30.00	33.10
9P	10.00	13.10	30P	36.25	39.35
10P	11.25	14.35			

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	TITLE 1.25mm PITCH HOUSING ULTRA LOW PROFILE		
mm	6:1	1 of 1			
DRAWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin	DRAWING NO. A1255H-XP		
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
					REV A2

A2	CHANGE THE DRAWING	2023.05.10
A1	CHANGE THE DRAWING	2021.10.28
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE