


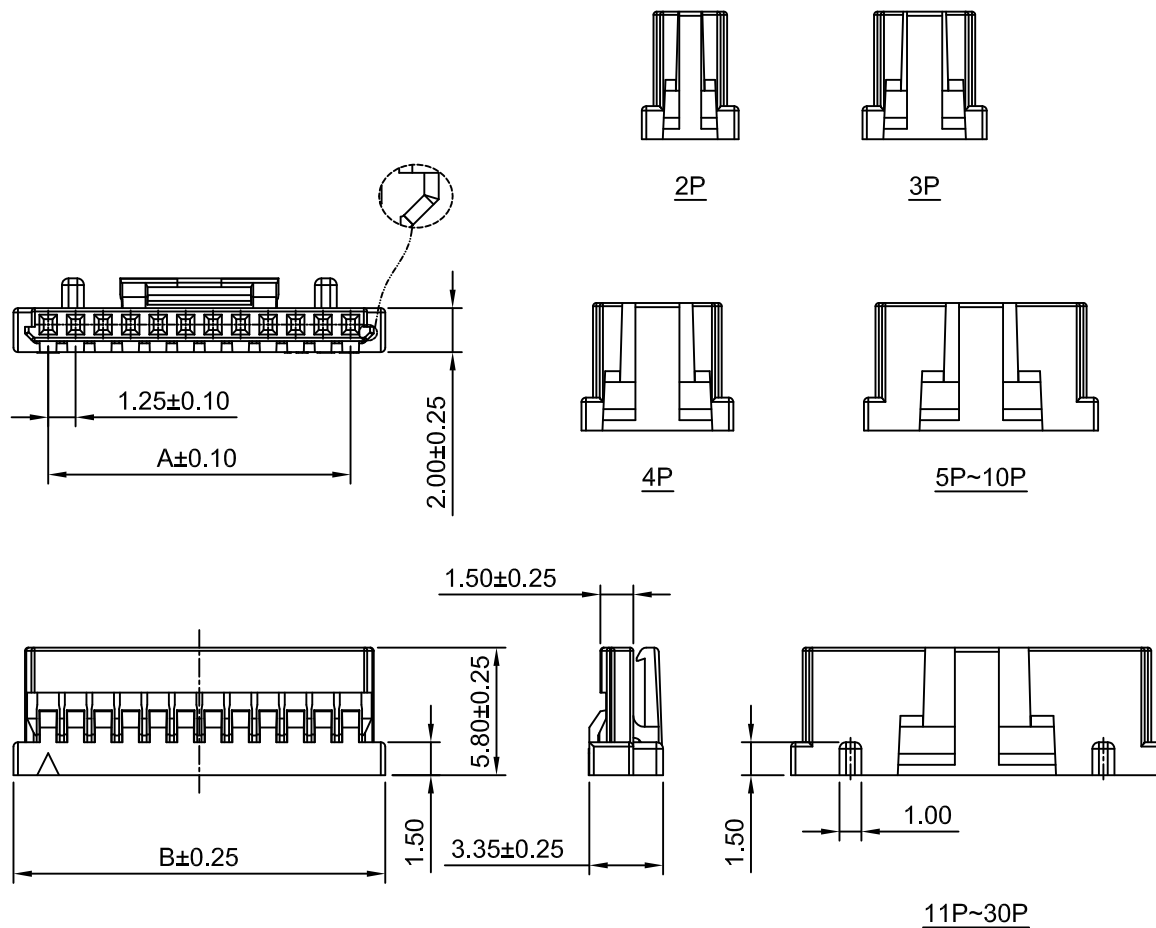

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1255HA-2P	1.25	4.40
A1255HA-3P	2.50	5.65
A1255HA-4P	3.75	6.90
A1255HA-5P	5.00	8.15
A1255HA-6P	6.25	9.40
A1255HA-7P	7.50	10.65
A1255HA-8P	8.75	11.90
A1255HA-9P	10.00	13.15
A1255HA-10P	11.25	14.40
A1255HA-11P	12.50	15.65
A1255HA-12P	13.75	16.90
A1255HA-13P	15.00	18.15
A1255HA-14P	16.25	19.40
A1255HA-15P	17.50	20.65
A1255HA-16P	18.75	21.90
A1255HA-17P	20.00	23.15
A1255HA-18P	21.25	24.40
A1255HA-19P	22.50	25.65
A1255HA-20P	23.75	26.90
A1255HA-21P	25.00	28.15
A1255HA-22P	26.25	29.40
A1255HA-23P	27.50	30.65
A1255HA-24P	28.75	31.90
A1255HA-25P	30.00	33.15
A1255HA-26P	31.25	34.40
A1255HA-27P	32.50	35.65
A1255HA-28P	33.75	36.90
A1255HA-29P	35.00	38.15
A1255HA-30P	36.25	39.40

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	3:1	1 of 1	1.25mm PITCH HOUSING ULTRA LOW PROFILE
DRWN	CHK'D	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO. A1255HA-XP
			REV A1