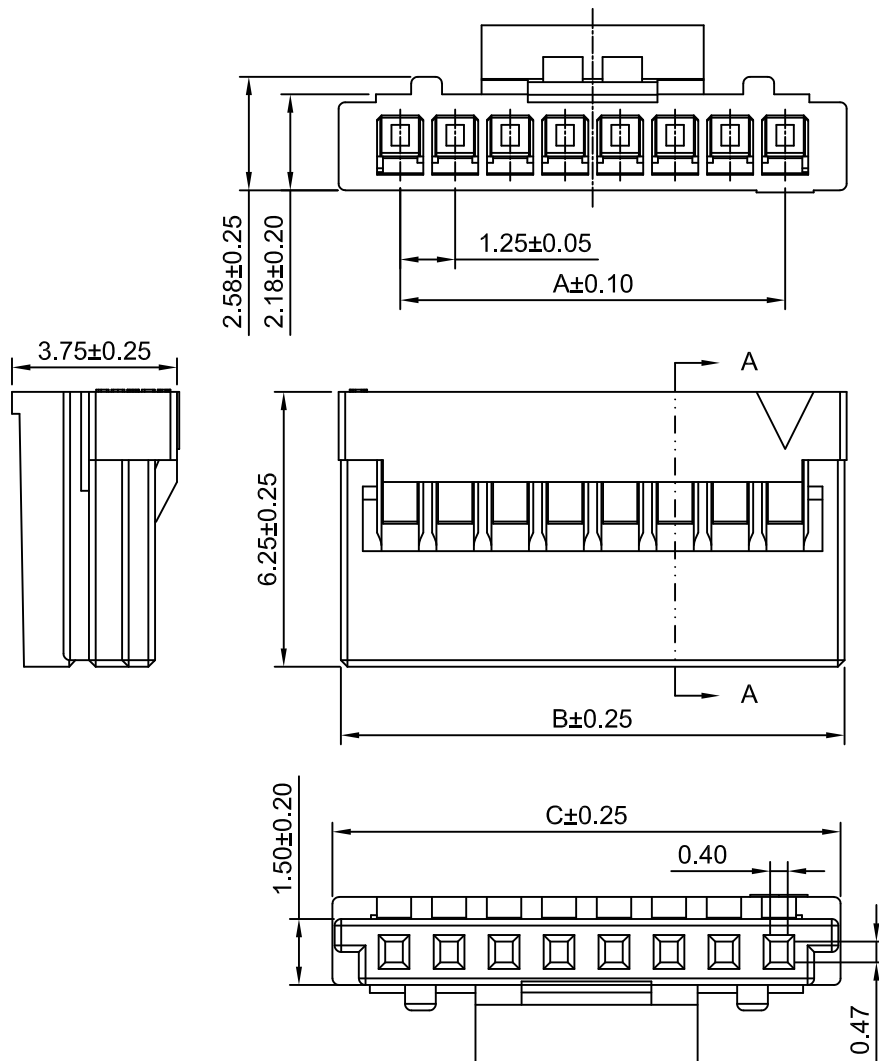


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	4.05	4.05	10P	11.25	13.95	14.05
3P	2.50	5.30	5.30	11P	12.50	15.20	15.30
4P	3.75	6.55	6.55	12P	13.75	16.45	16.55
5P	5.00	7.70	7.80	13P	15.00	17.70	17.80
6P	6.25	8.95	9.05	14P	16.25	18.95	19.05
7P	7.50	10.20	10.30	15P	17.50	20.20	20.30
8P	8.75	11.45	11.55	16P	18.75	21.45	21.55
9P	10.00	12.70	12.80				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
DRAWN	CHK'D	APPR
Wenmin Luo	Dlankul Wan	Jack Yin

TITLE

**1.25mm PITCH
HOUSING**

General Tolerances			THIRD ANGLE PROJECTION
x.xx±0.25			
x.xxx±0.20			
x.xxxx±0.15			
ANGLES ±1°			

DRAWING NO.		REV A0
A1255HB-XP		

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2021.08.25