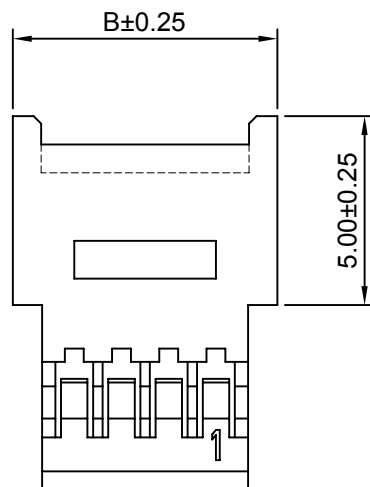

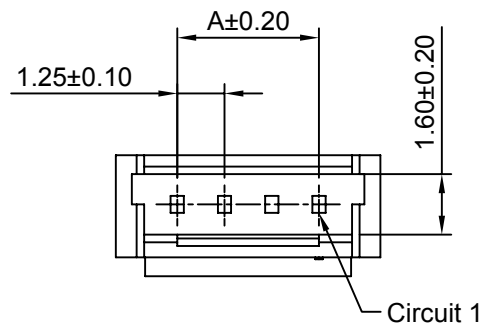


SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	4.50	10P	11.25	14.50
3P	2.50	5.75	11P	12.50	15.75
4P	3.75	7.00	12P	13.75	17.00
5P	5.00	8.25	13P	15.00	18.25
6P	6.25	9.50	14P	16.25	19.50
7P	7.50	10.75	15P	17.50	20.75
8P	8.75	12.00	20P	23.75	27.00
9P	10.00	13.25	25P	30.00	33.25

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw BY:

LIZQ

Approved :

GONGYB

Title :

1.25mm PITCH

HOUSING

DRAW NO : A1255HMA-XP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEEASE	2016.05.10

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	