
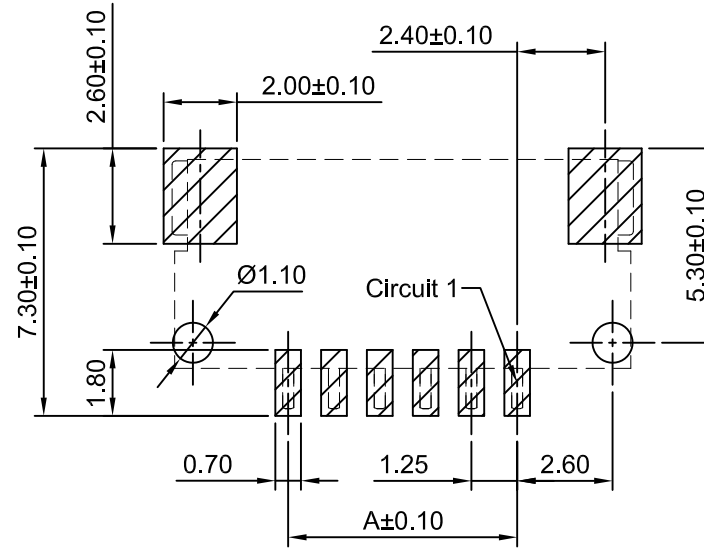
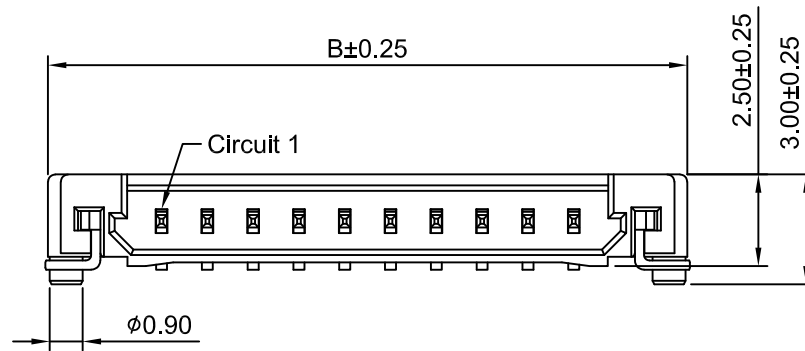
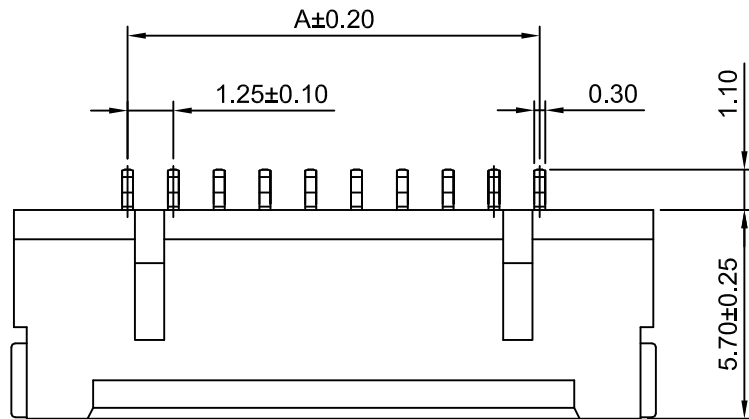


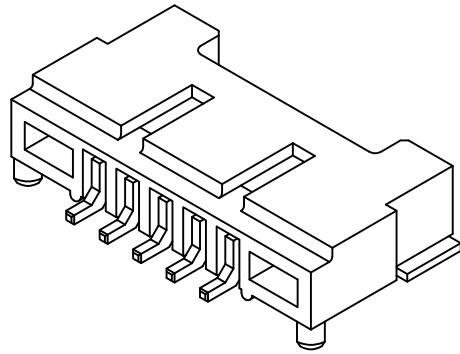

P.C.B. LAYOUT
TOLERANCE:±0.05

Ordering Information:
A1255WR-S-F-XP - LCP - ***
1 2 3
1.Part NO.
2.Material:
(blank): Nylon 9T,UL94V-0
LCP: LCP,UL94V-0
3.Finish:
(blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze
Solder Tabs: Phosphor Bronze
Material: LCP,UL94V-0(Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1255WR-S-F-2P	1.25	7.45
A1255WR-S-F-3P	2.50	8.70
A1255WR-S-F-4P	3.75	9.95
A1255WR-S-F-5P	5.00	11.20
A1255WR-S-F-6P	6.25	12.45
A1255WR-S-F-7P	7.50	13.70
A1255WR-S-F-8P	8.75	14.95
A1255WR-S-F-9P	10.00	16.20
A1255WR-S-F-10P	11.25	17.45
A1255WR-S-F-11P	12.50	18.70
A1255WR-S-F-12P	13.75	19.95
A1255WR-S-F-13P	15.00	21.20
A1255WR-S-F-14P	16.25	22.45
A1255WR-S-F-15P	17.50	23.70
A1255WR-S-F-16P	18.75	24.95
A1255WR-S-F-17P	20.00	26.20
A1255WR-S-F-18P	21.25	27.45
A1255WR-S-F-19P	22.50	28.70
A1255WR-S-F-20P	23.75	29.95
A1255WR-S-F-21P	25.00	31.20
A1255WR-S-F-22P	26.25	32.45
A1255WR-S-F-23P	27.50	33.70
A1255WR-S-F-24P	28.75	34.95
A1255WR-S-F-25P	30.00	36.20
A1255WR-S-F-26P	31.25	37.45
A1255WR-S-F-27P	32.50	38.70
A1255WR-S-F-28P	33.75	39.95
A1255WR-S-F-29P	35.00	41.20
A1255WR-S-F-30P	36.25	42.45

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		1:1		1 of 1		1.25mm PITCH 90° WAFER - SMD TYPE ULTRA LOW PROF ILE	
DRWN		CHK'D		APPR			
Dengchun Yi		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO.	
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°						REV A1	
A1255WR-S-F-XP-LCP							