

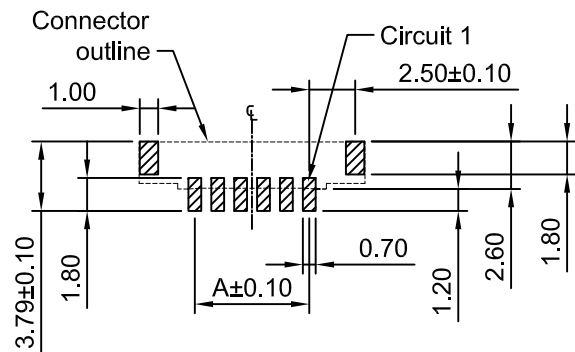
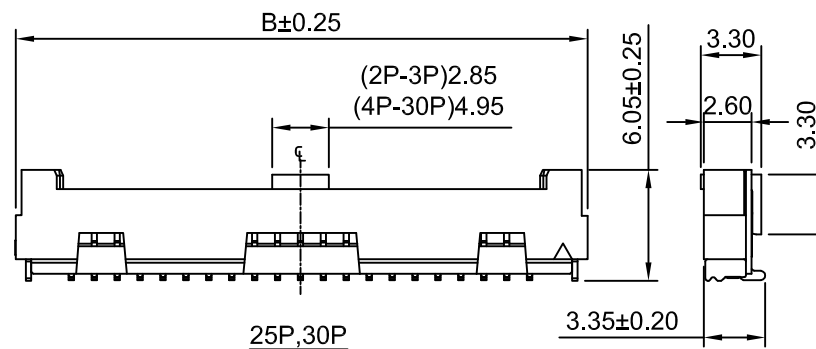
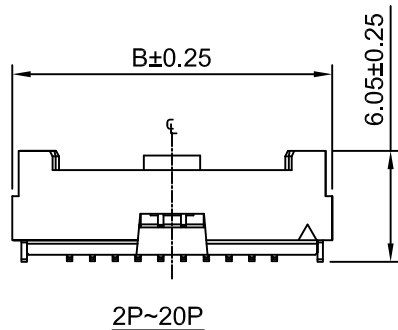


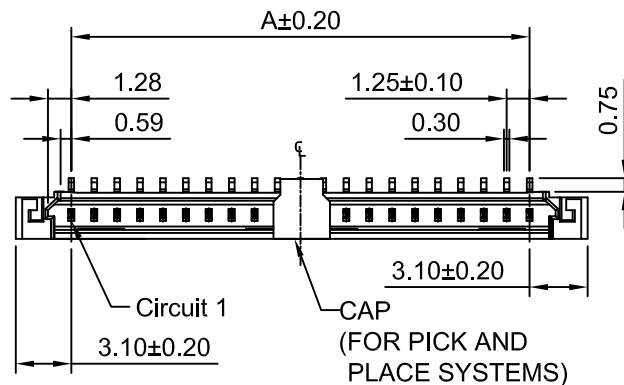

P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

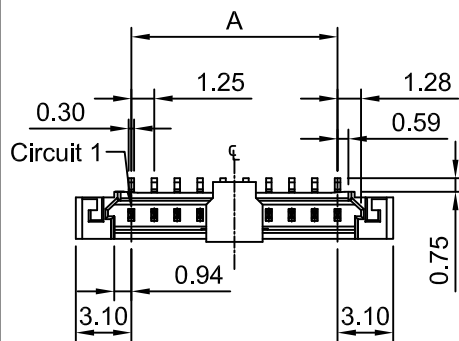

Ordering Information:
A1255WVA-S-XP - *** - ***
1 2 3

- Part NO.
- Halogen:
(Blank): Normal Material
HF: Halogen Free
- Finish:
(Blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin Over Nickel
Material: Nylon 6T UL94V-0(Beige)
Cap: Nylon 6T UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	7.45	11P	12.50	18.70
3P	2.50	8.70	12P	13.75	19.95
4P	3.75	9.95	13P	15.00	21.20
5P	5.00	11.20	14P	16.25	22.45
6P	6.25	12.45	15P	17.50	23.70
7P	7.50	13.70	20P	23.75	29.95
8P	8.75	14.95	25P	30.00	36.20
9P	10.00	16.20	30P	36.25	42.45
10P	11.25	17.45			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale			Sheet			TITLE 1.25mm PITCH 180° WAFER - SMT TYPE		
mm			2.5:1			1 of 1					
DRWN			CHKD			APPR					
Chengbiao Ye			Diankui Wan			Jack Yin			DRAWING NO. A1255WVA-S-XP		
General Tolerances			THIRD ANGLE PROJECTION			REV A2					
x.xx±0.25											
x.xxx±0.20											
x.xxx±0.15											
ANGLES ±1°											

A2	CHANGE THE DRAWING	2023.01.07
A1	CHANGE THE DRAWING	2021.02.25
A0	NEW RELEASE	2014.01.21
REV	DESCRIPTION	DATE