


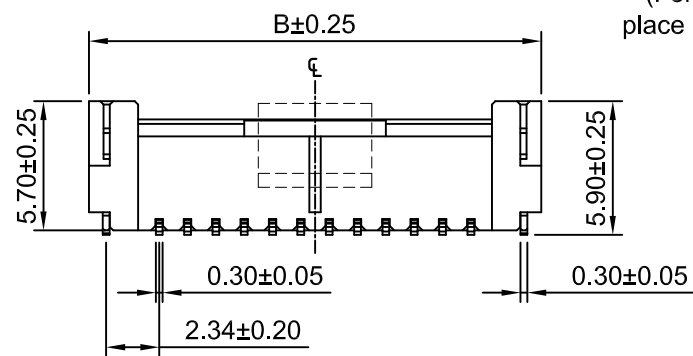
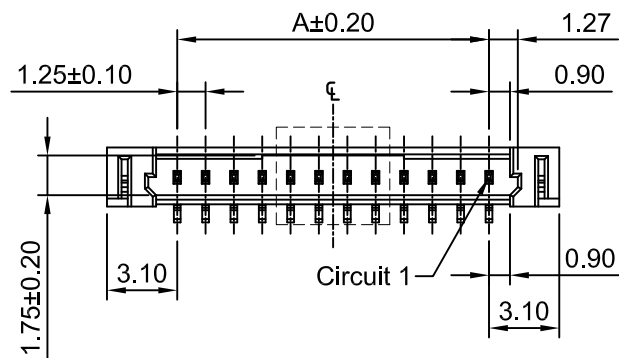


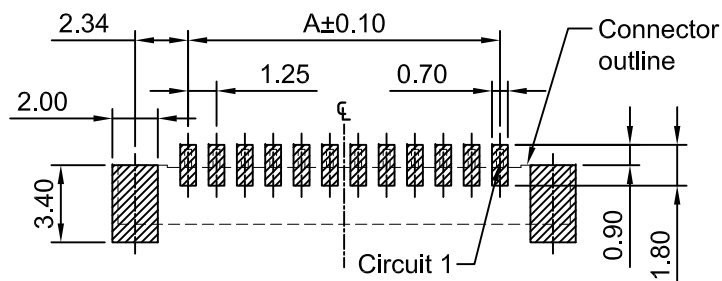

Cap
(For pick and
place systems)



P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

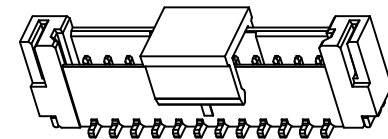

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin Over Nickel
Material: LCP,UL94V-0(Beige)
Cap: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	7.45	17P	20.00	26.20
3P	2.50	8.70	18P	21.25	27.45
4P	3.75	9.95	19P	22.50	28.70
5P	5.00	11.20	20P	23.75	29.95
6P	6.25	12.45	21P	25.00	31.20
7P	7.50	13.70	22P	26.25	32.45
8P	8.75	14.95	23P	27.50	33.70
9P	10.00	16.20	24P	28.75	34.95
10P	11.25	17.45	25P	30.00	36.20
11P	12.50	18.70	26P	31.25	37.45
12P	13.75	19.95	27P	32.50	38.70
13P	15.00	21.20	28P	33.75	39.95
14P	16.25	22.45	29P	35.00	41.20
15P	17.50	23.70	30P	36.25	42.45
16P	18.75	24.95			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1	1.25mm PITCH 180° WAFER - SMT TYPE	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A1255WVB-S-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A2	

A2	MODIFY DRAWING	2021.07.01
A1	CHANGE THE DRAWING	2021.02.25
A0	NEW RELEASE	2014.01.21
REV	DESCRIPTION	DATE