




4P~30P

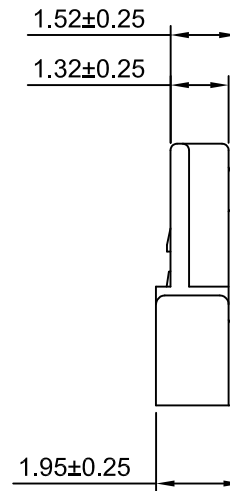

2P~3P

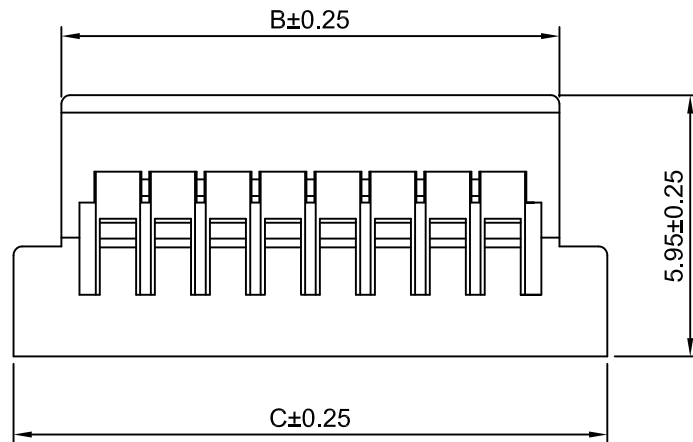

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	3.82	6.00	9P	10.00	12.57	14.75
3P	2.50	5.07	7.25	10P	11.25	13.82	16.00
4P	3.75	6.32	8.50	15P	17.50	20.07	22.25
5P	5.00	7.57	9.75	16P	18.75	21.32	23.50
6P	6.25	8.82	11.00	20P	23.75	26.32	28.50
7P	7.50	10.07	12.25	25P	30.00	32.57	34.75
8P	8.75	11.32	13.50	30P	36.25	38.82	41.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		6:1		1 of 1			
DRAWN		CHK'D		APPR		1.25mm PITCH HOUSING ULTRA LOW PROFILE	
Chengbiao Ye		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A1256H-XP	
x,xx±0.25 x,xxx±0.20 x,xxx±0.15 ANGLES ±1°							
						REV A3	

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2022.12.27
A2	CHANGE THE DRAWING	2022.07.16
A1	CHANGE THE DRAWING	2019.12.25
A0	NEW RELEASE	2005.05.10